

Chapter Composition of Endmills

◆ Products are arranged by machining type.

Features and applications of the endmills
Designation of the endmill type
Series name of the endmills
Icons indicate tool shape
Applicable work materials are shown
Tables of standard cutting conditions

TUNGMEISTER Heads of chamfering type
VCA Diameter $\phi 10-20\text{mm}$ **P M K S H**
Chamfering and countersinking (without center edge)

TUNGMEISTER Heads of chamfering type
VCW Diameter $\phi 11.8\text{mm}$ **P M K S H**
For double chamfering

TUNGMEISTER Heads of chamfering type
VCR Diameter $\phi 8-20\text{mm}$ **P M K S H**
For concave radii milling

Standard cutting conditions: Chamfering and countersinking (VCA, VCW, VCR, VCP)

Work materials	Hardness	Cutting speed Vc (m/min)	Feed per tooth fz (mm/t)
Low carbon steels S45C, S55C etc (C45, C35 etc)	~ 300 HB	80 (50-100)	0.09 (0.06-0.12)
High carbon steels SCM440, SC415 etc (SCM440, SC50 etc)	~ 380 HB	60 (50-80)	0.09 (0.06-0.12)
Pearlhardened steel PXS, NAK80 etc	30 ~ 40 HRC	50 (40-70)	0.09 (0.06-0.12)
Stainless steels SUS304, SUS316 etc (XSCN18-8, XSCNMo17-12-2 etc)	~ 200 HB	40 (30-50)	0.09 (0.06-0.12)
Grey cast irons FC250, FC300 etc (GG25, GG30 etc)	150 ~ 250 HB	100 (80-120)	0.09 (0.06-0.12)
Ductile cast irons FC600 etc (GG600 etc)	-	100 (80-120)	0.09 (0.06-0.12)
Aluminium alloys	-	150 (100-200)	0.1 (0.08-0.15)
Titanium alloys Ti-6Al-4V etc	-	40 (30-50)	0.07 (0.05-0.10)
Heat-resistant alloys Inconel 718 etc	-	30 (20-40)	0.06 (0.04-0.08)
Hardened steel SKD11, SKH4 etc (D40CA, etc) (SKD11, SKH4 etc)	40 ~ 50 HRC	40 (30-50)	0.07 (0.05-0.10)
Hardened steel SKD11, SKH4 etc (D1530CA, etc) (SKD11, SKH4 etc)	50 ~ 60 HRC	30 (20-40)	0.06 (0.04-0.08)

Tolerance of tool diameter

Basic dimensions (mm)		Permissible dimensional deviations (μm)							
>	≤	e8	e9	h6	h7	h9	h10	z9	
6	10	-25	-25	0	0	0	0	+78	
		-47	-61	-9	-15	-36	-58	+42	
10	14	-32	-32	0	0	0	0	+93	
		-59	-75	-11	-18	-43	-70	+50	
14	18	-32	-32	0	0	0	0	+103	
		-59	-75	-11	-18	-43	-70	+60	
18	30	-40	-40	0	0	0	0	-	
		-73	-92	-13	-21	-52	-84	-	

◆ JISB4010-2: 1998 (ISO286-2: 1988) extract

Reference pages of relating items
Cat. Nos. of TAC mills
Details of cutting edge
Symbols of stock status
Dimensions
Tolerances of tool and shank diameters are shown.


Icons overview

■ Icons showing tool shape

● Number of flutes ● Helix angle ● Tool diameter range ● Icons indicate corner angle

4 No. of flutes **30°** Helix Diameter $\phi 10.0 \sim 16.0\text{mm}$ **86°** **65°** **45°**

■ Icons showing machining types

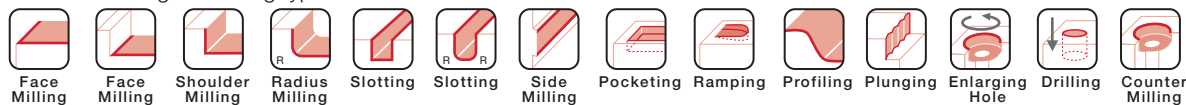

■ Ordering information

- When ordering heads of TungMeister, please specify Cat. No. and quantity.
Example: **VEE080L05.0R00-03S05** 2 pieces. (Standard packing quantity is 2 pieces.)
- When ordering shanks of TungMeister, please specify Cat. No. and quantity.
Example: **VSSD08L060S05-S** 1 piece. (Standard packing quantity is 1 piece.)
- Wrench of TungMeister should be ordered separately.

Guidance

■ Features of TungMeister (Indexable endmills)	10-2
■ Designation system for TungMeister	10-4

10 Endmills

Products

■ TungMeister (Indexable endmills)

Heads

● Square type	VED, VEE	10-5
● Toroidal type	VRB, VRC, VRD, VFX	10-9
● Ball type	VBB, VBD, VBE	10-12
● Drilling type	VCP, VDP, VGC	10-15
● Chamfering type	VCA, VCW, VCR	10-18
● Slotting type	VST, VTB	10-20

Shanks

● Straight	VSSD	10-23
● Straight (Weldon)	VSSD	10-24
● Straight (Taper neck)	VTSD	10-25
● Straight (for Slotting)	VSC, VSTD	10-26
● Adapters of TungFlex	VAD-M	10-27

TUNGMEISTER Features

**The most effective tooling solution
with the option of hundreds of tools!**
**Tool changeover times can be measurably
reduced!**

► Reduces tool changeover times drastically!!



- Machine downtime is decreased considerably.

Increases productivity by 90%



► Highly accurate repeatability

- Accuracy can be maintained by touching the taper and face.

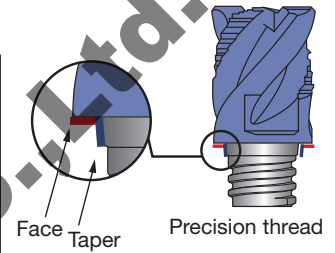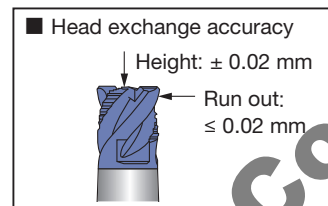

► The weight of the tool to be disposed is reduced

- Reduces tool disposal

For example: $\varnothing 12$ mm / square endmill

TUNGMEISTER : OAL 20 mm \rightarrow weight 20 g
conventional solid endmill : OAL 80 mm \rightarrow weight 140 g

► No regrinding cost

- No laborious endmill regrinding required.

10

Endmills

1 Wide range of cutting heads (257 items)



Flexible combinations

2 Three kinds of shank material








Overview

Head

Head	Square	Toroidal	Ball	Drilling (Centering drill)	Chamfering	Slotting
Appearance						
Page	10-5 ~ 8	10-9, 11	10-12, 13	10-15 ~ 17	10-18	10-20 ~ 22


Shank

Shank	Straight	Weldon	Straight	Straight	Adaptor for
Neck	Straight	Straight	Taper	(Slotting)	TungFlex
Appearance					
Steel	●	●	●	●	●
Carbide	●	-	●	●	-
Carbide (with coolant hole)	-	-	-	●	-
Tungsten (with coolant hole)	●	-	●	-	-
Page	10-23, 24	10-24	10-25, 26	10-26	10-27

Cutting performance

Work material: SUS304 / X5CrNi18-10 (200HB) Grade: AH725 Machine : Horizontal M/C BT40
 Head : VEE100L07.0R05-04S06 Shank: VSSD10L075S06-S Holder : Collet chuck
 (ø10 mm, square type, 4 flutes) (Straight shank & neck, steel) Cutting fluids: Dry


Comparison of milling in stainless steels

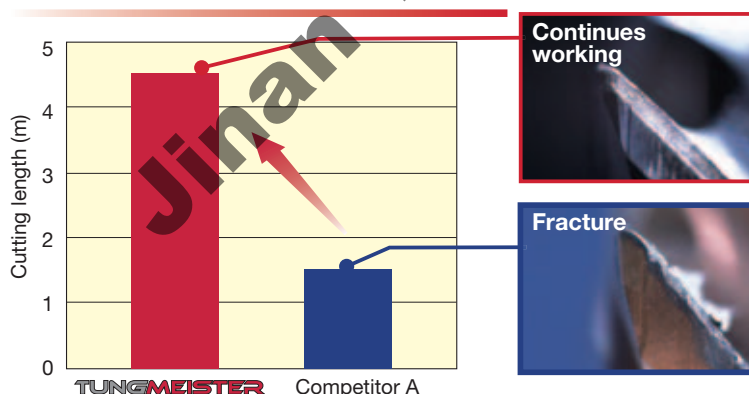

Cutting speed : $V_c = 100$ m/min
 Feed per tooth : $f_z = 0.07$ mm/t
 Depth of cut : $a_p = 5$ mm
 Cutting width : $a_e = 1.5$ mm

- Competitor A cutting edges fractured after 1.7 minutes machining and 1.5 m cutting length.
- The TungMeister cutting edges maintain operation after 5 minutes machining.

Comparison of milling surface on stainless steels

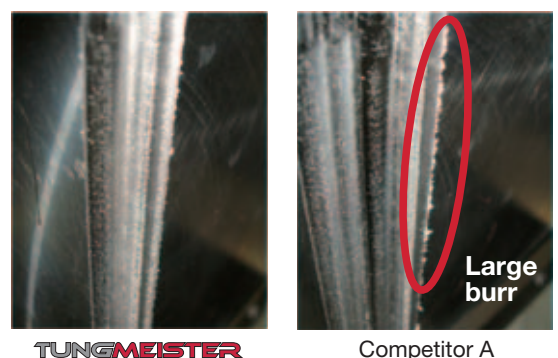

Cutting speed : $V_c = 130$ m/min
 Feed per tooth : $f_z = 0.05$ mm/t
 Depth of cut : $a_p = 5$ mm
 Cutting width : $a_e = 2$ mm

- When machining tough stainless steel the burr with the TungMeister is minimal. However, competitor A has a large burr when working under the same conditions.

Shank

V SS D10 L070 S 06 - W - A

1 2 3 4 5 6 7 8

1 Series	
V	TungMeister

2 Shank type	
SS	Straight neck
TS	Taper neck
SC	Slotting
ST	for T-Slotting
AD	TungFlex adaptor

3 Shank diameter (mm)	
D08	ø8
D10	ø10
D12	ø12
D16	ø16
D20	ø20
D25	ø25
VSC, VAD type	
100	ø10
120	ø12
130	ø13
180	ø18
210	ø21

4 Length (mm)	
L070	70

5 Shape of shank	
S	Cylindrical
W	Weldon

6 Connection screw size	
05	S05
06	S06
08	S08
10	S10
12	S12

7 Shank material	
S	Steel
C	Carbide
W	Tungsten

8 Additional feature	
A	with coolant hole
M	Screw size (TungFlex adaptors)

Head

• Square endmill

V E E 080 L05.0 R00 - 03 S05

1 2 3 4 5 6 7 8 9

• Ball nose endmill

V B D 200 L15.0 - BG - 04 S12

1 2 3 4 5 6 7 8 9

1 Series	
V	TungMeister

2 Cutting edge	
E	Square
B	Ball
R	Radius
FX	for high feed
CA	for chamfering
CP	Spot drilling
CW	for chamfering (front and back)
CR	for R chamfering
GC	for counter boring
DP	for center drilling
S	for slotting
T	for T-slotting

3 Helix angle / Rake face	
B	0°
C	15°
D	30°
E	45°
F	60°
T	Land

4 Diameter (mm)	
060	ø6
200	ø20

5 Cutting edge length (mm)	
Length	
L07.0	7
L15.0	15
Groove width	
W1.50	1.5
W1.57	1.57
W10.0	10

6 Corner shape / Angle	
Nose radius	
R00	Sharp edge
R005	R0.05
R01	R0.1
R05	R0.5
R10	R1.0
Chamfer type	
C15	0.15 x 45°
C30	0.3 x 45°
C60	0.6 x 45°
Chamfering head	
A30	30°
A60	60°
R chamfering head	
R10	R1.0
R16	R1.6
Ball nose	
SG	Sphere / high precision
BM	Ball / general purpose
BG	Ball / high precision

7 Additional feature	
I	Irregular pitch
A	for aluminium
R	for roughing
C	Combined edge

8 The number of flutes	
General	
02	2
06	6
Slotting head VST type	
3	3
4	4

9 Connection screw size	
S05	S05
S06	S06
S08	S08
S10	S10
S12	S12

10

Endmills

TUNGMEISTER Heads of square type VEE

3
No. of
flutes

45°
Helix

Diameter
Ø8~12mm

90°

P
Steel

M
Stainless


K
Cast Iron

S
Superalloys

H
Hard
Materials



For general purpose
corner radii: $r = 0 \text{ mm}$

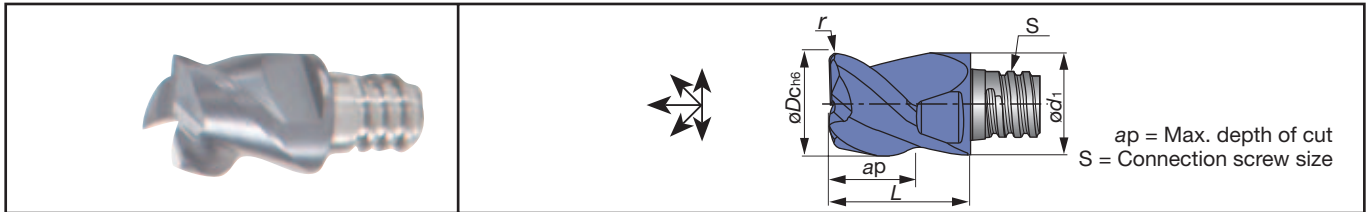

Cat. No.	Grade AH725	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
				ØDc	Ød1	ap	r	S	L		
VEE080L05.0R00-03S05	●	3	45°	8	7.7	5	0	S05	10.0	KEYV-S05	7
VEE100L07.0R00-03S06	●	3	45°	10	9.7	7	0	S06	13.0	KEYV-S06	10
VEE120L09.0R00-03S08	●	3	45°	12	11.7	9	0	S08	16.5	KEYV-S08	15

TUNGMEISTER Heads of square type VED / VEE

4
No. of
flutes

30°/45°
Helix

Diameter
Ø6~20mm

90°

P
Steel

M
Stainless


K
Cast Iron

S
Superalloys

H
Hard
Materials



For general purpose
corner radii: $r = 0 \sim 4.0 \text{ mm}$

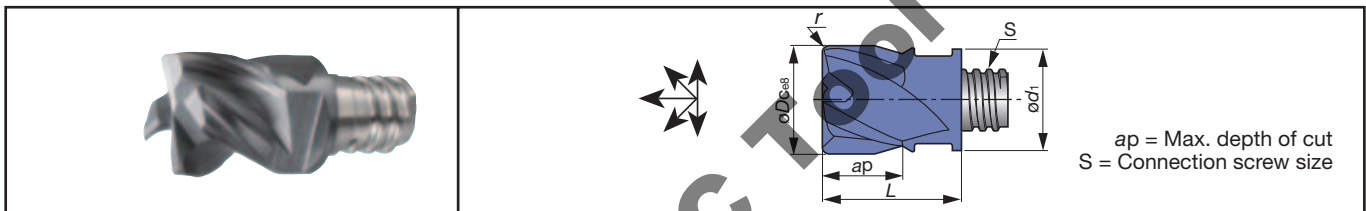

Cat. No.	Grade AH725	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
				ØDc	Ød1	ap	r	S	L		
VEE060L05.0R00-04S05	●	4	45°	6	8	5	0	S05	10.0	KEYV-S05	7
VEE080L05.0R00-04S05	●	4	45°	8	7.7	5	0	S05	10.0		
VED080L05.0R05-04S05	●	4	30°	8	7.7	5	0.5	S05	10.0		
VED080L05.0R10-04S05	●	4	30°	8	7.7	5	1.0	S05	10.0		
VED080L05.0R15-04S05	●	4	30°	8	7.7	5	1.5	S05	10.0	KEYV-S06	10
VEE100L07.0R00-04S06	●	4	45°	10	9.7	7	0	S06	13.0		
VED100L07.0R05-04S06	●	4	30°	10	9.7	7	0.5	S06	13.0		
VED100L07.0R10-04S06	●	4	30°	10	9.7	7	1.0	S06	13.0		
VED100L07.0R15-04S06	●	4	30°	10	9.7	7	1.5	S06	13.0	KEYV-S08	15
VEE120L09.0R00-04S08	●	4	45°	12	11.7	9	0	S08	16.5		
VED120L09.0R05-04S08	●	4	30°	12	11.7	9	0.5	S08	16.5		
VED120L09.0R10-04S08	●	4	30°	12	11.7	9	1.0	S08	16.5		
VED120L09.0R15-04S08	●	4	30°	12	11.7	9	1.5	S08	16.5	KEYV-S10	28
VEE160L12.0R00-04S10	●	4	45°	16	15.3	12	0	S10	20.5		
VED160L12.0R05-04S10	●	4	30°	16	15.3	12	0.5	S10	20.5		
VED160L12.0R10-04S10	●	4	30°	16	15.3	12	1.0	S10	20.5		
VED160L12.0R15-04S10	●	4	30°	16	15.3	12	1.5	S10	20.5		
VED160L12.0R20-04S10	●	4	30°	16	15.3	12	2.0	S10	20.5		
VED160L12.0R30-04S10	●	4	30°	16	15.3	12	3.0	S10	20.5		
VED160L12.0R40-04S10	●	4	30°	16	15.3	12	4.0	S10	20.5		
VED160L12.0R45-04S10	●	4	30°	16	15.3	12	4.5	S10	20.5		
VED160L12.0R50-04S10	●	4	30°	16	15.3	12	5.0	S10	20.5		
VED160L12.0R55-04S10	●	4	30°	16	15.3	12	6.0	S10	20.5		
VED160L12.0R60-04S10	●	4	30°	16	15.3	12	6.5	S10	20.5		
VED160L12.0R65-04S10	●	4	30°	16	15.3	12	7.0	S10	20.5	KEYV-S12	28
VED160L12.0R70-04S10	●	4	30°	16	15.3	12	7.5	S10	20.5		
VED160L12.0R75-04S10	●	4	30°	16	15.3	12	8.0	S10	20.5		
VED160L12.0R80-04S10	●	4	30°	16	15.3	12	8.5	S10	20.5		
VED200L15.0R00-04S12	●	4	45°	20	18.3	15	0	S12	25.5	KEYV-S12	28
VED200L15.0R05-04S12	●	4	30°	20	18.3	15	0.5	S12	25.5		
VED200L15.0R10-04S12	●	4	30°	20	18.3	15	1.0	S12	25.5		
VED200L15.0R20-04S12	●	4	30°	20	18.3	15	2.0	S12	25.5		
VED200L15.0R30-04S12	●	4	30°	20	18.3	15	3.0	S12	25.5		

● : Stocked items / Packing Quantity = 2 pcs.

sales@intertek.com

pages

Cutting Conditions
(10-10)

Technical reference
(15-1)

10

Endmills

10-5

TUNGMEISTER Heads of square type VEE

3
No. of
flutes

38°
Helix

Diameter
ø7.7~19.7mm

90°

P
Steel

M
Stainless


K
Cast Iron

S
Superalloys

H
Hard
Materials



For roughing before keyways
corner radii: $r = 0.2 \sim 0.4 \text{ mm}$

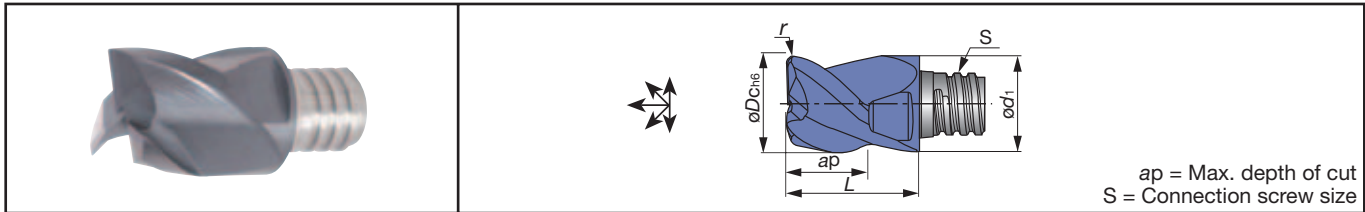

Cat. No.	Grade AH725	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
				øDc	ød1	ap	r	S	L		
VEE077L04.0R02-03S05	●	3	38°	7.7	7.7	4	0.2	S05	10.0	KEYV-S05	7
VEE097L05.0R03-03S06	●	3	38°	9.7	9.7	5	0.3	S06	13.0	KEYV-S06	10
VEE117L07.0R03-03S08	●	3	38°	11.7	11.7	7	0.3	S08	16.5	KEYV-S08	15
VEE157L08.0R03-03S10	●	3	38°	15.7	15.3	8	0.3	S10	20.5	KEYV-S10	28
VEE197L12.0R04-03S12	●	3	38°	19.7	18.3	12	0.4	S12	25.5	KEYV-S12	28

TUNGMEISTER Heads of square type VEE-I

4
No. of
flutes

38°
Helix

Diameter
ø8~20mm

90°


P
Steel

M
Stainless


K
Cast Iron

S
Superalloys

H
Hard
Materials



Irregular pitch

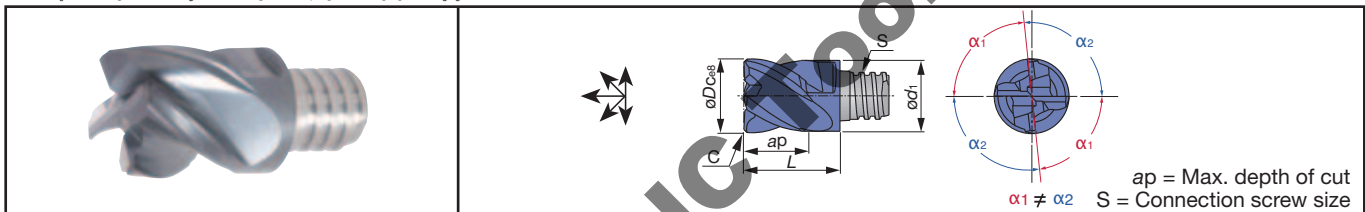

Cat. No.	Grade AH725	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
				øDc	ød1	ap	C	S	L		
VEE080L05.0C30I04S05	●	4	38°	8	7.7	5	0.3	S05	10.0	KEYV-S05	7
VEE100L07.0C40I04S06	●	4	38°	10	9.7	7	0.4	S06	13.0	KEYV-S06	10
VEE120L09.0C50I04S08	●	4	38°	12	11.7	9	0.5	S08	16.5	KEYV-S08	15
VEE160L12.0C60I04S10	●	4	38°	16	15.3	12	0.6	S10	20.5	KEYV-S10	28
VEE200L15.0C60I04S12	●	4	38°	20	18.3	15	0.6	S12	25.5	KEYV-S12	28

TUNGMEISTER Heads of square type VEE-R

4/5/6
No. of
flutes

45°
Helix

Diameter
ø8~20mm

90°


P
Steel

M
Stainless


K
Cast Iron

S
Superalloys

H
Hard
Materials



For roughing

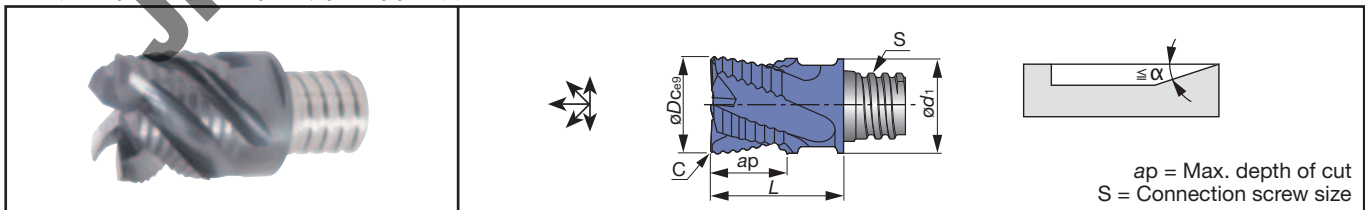

Cat. No.	Grade AH725	No. of flutes	Helix angle	Dimensions (mm)							Wrench	Torque (N·m)
				øDc	ød1	ap	C	S	L	α		
VEE080L05.0C25R04S05	●	4	45°	8	7.7	5	0.25	S05	10.0	90°	KEYV-S05	7
VEE100L07.0C30R04S06	●	4	45°	10	9.7	7	0.3	S06	13.0	90°	KEYV-S06	10
VEE120L09.0C35R04S08	●	4	45°	12	11.7	9	0.35	S08	16.5	90°	KEYV-S08	15
VEE160L12.0C40R05S10	●	5	45°	16	15.3	12	0.4	S10	20.5	7°	KEYV-S10	28
VEE200L15.0C40R06S12	●	6	45°	20	18.3	15	0.4	S12	25.5	3°	KEYV-S12	28

● : Stocked items / Packing Quantity = 2 pcs.

10

Endmills

TUNGMEISTER Heads of square type VEE-C

4
No. of
flutes

45°
Helix

Diameter
ø8~20mm

90°


P
Steel

M
Stainless


K
Cast Iron

S
Superalloys

H
Hard
Materials



Combined edges for finishing & roughing

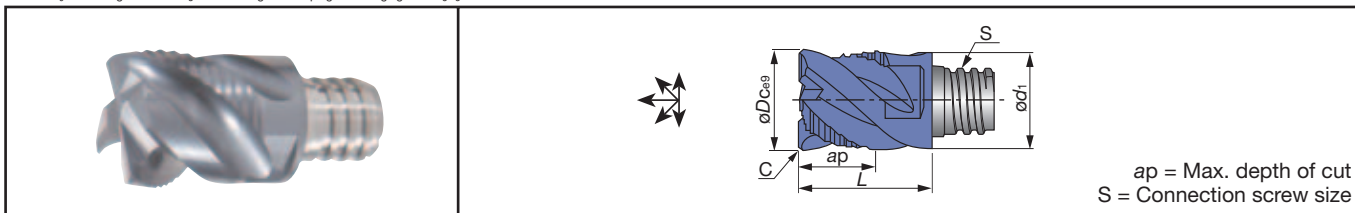

Cat. No.	Grade AH725	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
				øDc	ød1	ap	C	S	L		
VEE080L05.0C30C04S05	●	4	45°	8	7.7	5	0.3	S05	10.0	KEYV-S05	7
VEE100L07.0C30C04S06	●	4	45°	10	9.7	7	0.3	S06	13.0	KEYV-S06	10
VEE120L09.0C40C04S08	●	4	45°	12	11.7	9	0.4	S08	16.5	KEYV-S08	15
VEE160L12.0C60C04S10	●	4	45°	16	15.3	12	0.6	S10	20.5	KEYV-S10	28
VEE200L15.0C60C04S12	●	4	45°	20	18.3	15	0.6	S12	25.5	KEYV-S12	28

TUNGMEISTER Heads of square type VEE-A

2
No. of
flutes

45°
Helix


Diameter
ø10~12mm

90°

N
Non-ferrous



For aluminium machining
corner radii: $r = 0.5 \sim 1.0$ mm

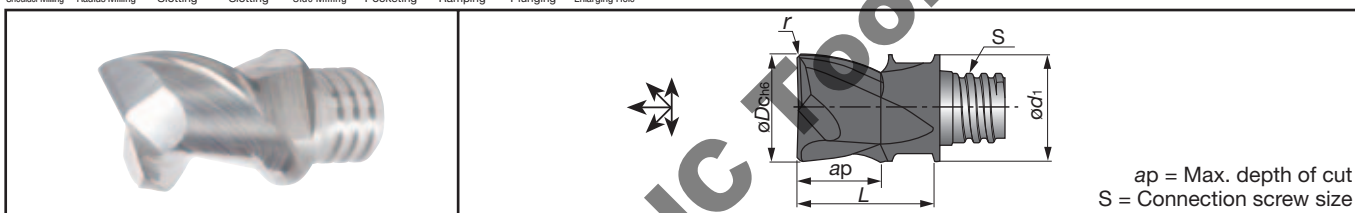

Cat. No.	Grade KS15F	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
				øDc	ød1	ap	r	S	L		
VEE100L07.0R05A02S06	●	2	45°	10	9.7	7	0.5	S06	13.0	KEYV-S06	10
VEE100L07.0R10A02S06	●	2	45°	10	9.7	7	1.0	S06	13.0	KEYV-S06	10
VEE120L09.0R05A02S08	●	2	45°	12	11.7	9	0.5	S08	16.5	KEYV-S08	15

TUNGMEISTER Heads of square type VEE-A

3
No. of
flutes

45°
Helix


Diameter
ø8~20mm

90°

N
Non-ferrous



For aluminium machining
corner radii: $r = 0 \sim 2.0$ mm

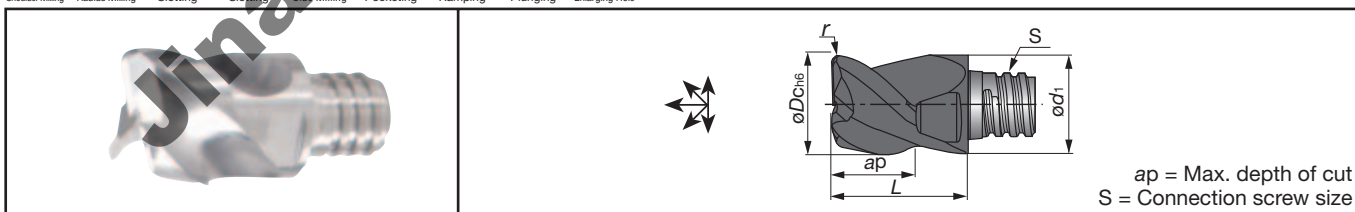

Cat. No.	Grade KS15F	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
				øDc	ød1	ap	r	S	L		
VEE080L05.0R05A03S05	●	3	45°	8	7.7	5	0.5	S05	10.0	KEYV-S05	7
VEE100L06.0R05A03S06	●	3	45°	10	9.7	6	0.5	S06	13.0	KEYV-S06	10
VEE100L06.0R10A03S06	●	3	45°	10	9.7	6	1.0	S06	13.0	KEYV-S06	10
VEE120L08.0R05A03S08	●	3	45°	12	11.7	8	0.5	S08	16.5	KEYV-S08	15
VEE120L08.0R10A03S08	●	3	45°	12	11.7	8	1.0	S08	16.5	KEYV-S08	15
VEE160L10.0R00A03S10	●	3	45°	16	15.3	10	0	S10	20.5	KEYV-S10	28
VEE160L10.0R10A03S10	●	3	45°	16	15.3	10	1.0	S10	20.5	KEYV-S10	28
VEE160L10.0R20A03S10	●	3	45°	16	15.3	10	2.0	S10	20.5	KEYV-S10	28
VEE200L12.0R05A03S12	●	3	45°	20	18.3	12	0.5	S12	25.5	KEYV-S12	28
VEE200L12.0R10A03S12	●	3	45°	20	18.3	12	1.0	S12	25.5	KEYV-S12	28
VEE200L12.0R20A03S12	●	3	45°	20	18.3	12	2.0	S12	25.5	KEYV-S12	28

● : Stocked items / Packing Quantity = 2 pcs.

sales@interuk.com

pages

Cutting Conditions
(10-10)

Technical reference
(15-1)

10-7

10

Endmills

TUNGMEISTER Heads of square type VED / VEE

6
No. of flutes

30°/45°/
50°
Helix


Diameter
ø8~12mm

90°

S **H**
Superalloys Hard
Materials



Without central edge
corner radii: $r = 0 \sim 1.5 \text{ mm}$

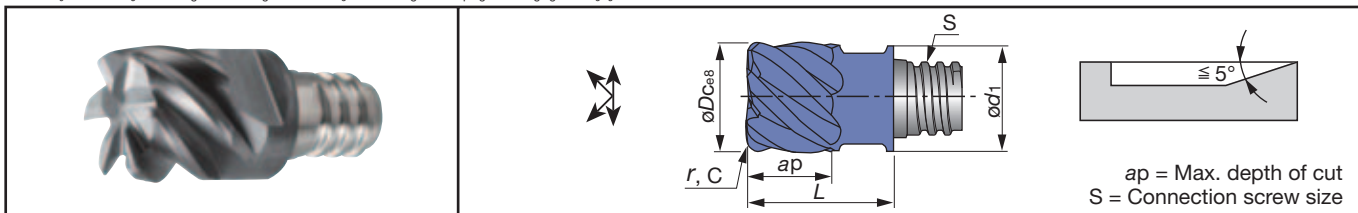

Cat. No.	Grade		No. of flutes	Helix angle	Dimensions (mm)							Wrench	Torque (N-m)
	AH725	AH750			øDc	ød1	ap	r	C	S	L		
VEE080L05.0R05-06S05	●		6	45°	8	7.7	5	0.5	-	S05	10.0	KEYV-S05	7
VEE080L05.0R10-06S05	●		6	45°	8	7.7	5	1.0	-	S05	10.0		
VEE080L05.0R15-06S05	●		6	45°	8	7.7	5	1.5	-	S05	10.0		
VEE080L05.0C10-06S05		●	6	50°	8	7.7	5	-	0.1	S05	10.0		
VEE100L07.0R00-06S06	●		6	45°	10	9.7	7	0	-	S06	13.0	KEYV-S06	10
VED100L07.0R05-06S06	●		6	30°	10	9.7	7	0.5	-	S06	13.0		
VEE100L07.0R05-06S06	●		6	45°	10	9.7	7	0.5	-	S06	13.0		
VED100L07.0R10-06S06	●		6	30°	10	9.7	7	1.0	-	S06	13.0		
VEE100L07.0R10-06S06	●		6	45°	10	9.7	7	1.0	-	S06	13.0		
VED100L07.0R15-06S06	●		6	30°	10	9.7	7	1.5	-	S06	13.0		
VEE100L07.0R15-06S06	●		6	45°	10	9.7	7	1.5	-	S06	13.0		
VEE100L07.0C10-06S06		●	6	50°	10	9.7	7	-	0.1	S06	13.0		
VEE120L09.0R00-06S08	●		6	45°	12	11.7	9	0	-	S08	16.5	KEYV-S08	15
VED120L09.0R05-06S08	●		6	30°	12	11.7	9	0.5	-	S08	16.5		
VED120L09.0R10-06S08	●		6	30°	12	11.7	9	1.0	-	S08	16.5		
VEE120L09.0R10-06S08	●		6	45°	12	11.7	9	1.0	-	S08	16.5		
VEE120L09.0R15-06S08	●		6	45°	12	11.7	9	1.5	-	S08	16.5		
VEE120L09.0C10-06S08		●	6	50°	12	11.7	9	-	0.1	S08	16.5		

10

Endmills

TUNGMEISTER Heads of square type VED / VEE

8/10
No. of flutes

30°/50°
Helix


Diameter
ø16~20mm

90°

S **H**
Superalloys Hard
Materials



Without central edge
corner radii: $r = 0.5 \sim 2.0 \text{ mm}$

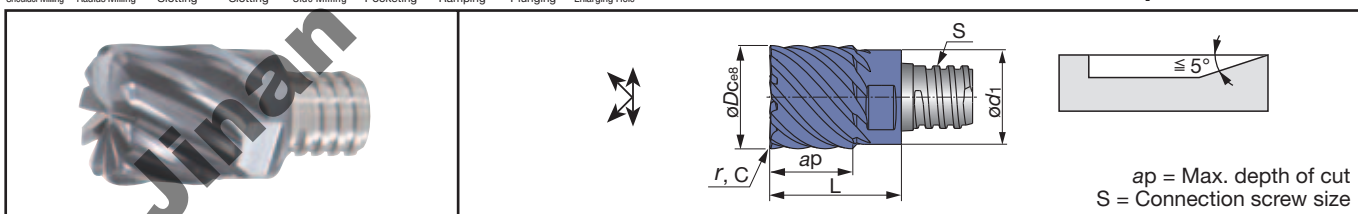

Cat. No.	Grade		No. of flutes	Helix angle	Dimensions (mm)							Wrench	Torque (N-m)
	AH725	AH750			øDc	ød1	ap	r	C	S	L		
VED160L12.0R05-08S10	●		8	30°	16	15.3	12	0.5	-	S10	20.5	KEYV-S10	28
VED160L12.0R10-08S10	●		8	30°	16	15.3	12	1.0	-	S10	20.5		
VED160L12.0R16-08S10	●		8	30°	16	15.3	12	1.6	-	S10	20.5		
VED160L12.0R20-08S10	●		8	30°	16	15.3	12	2.0	-	S10	20.5		
VEE160L12.0C20-08S10		●	8	50°	16	15.3	12	-	0.2	S10	20.5		
VED200L15.0R10-10S12	●		10	30°	20	18.3	15	1.0	-	S12	25.5	KEYV-S12	28
VED200L15.0R20-10S12	●		10	30°	20	18.3	15	2.0	-	S12	25.5		
VEE200L15.0C20-10S12		●	10	50°	20	18.3	15	-	0.2	S12	25.5		

● : Stocked items / Packing Quantity = 2 pcs.

VRB / VRC

2
No. of
flutes

15°/0°
Helix

5°/7°
relief
angle

Diameter
ø10~20mm



P
Steel

M
Stainless



K
Cast Iron

S
Superalloys

H
Hard
Materials



Radius Milling Pocketing Ramping Enlarging Hole

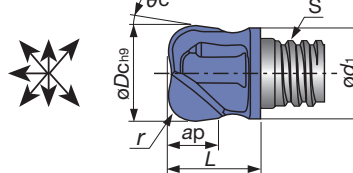

ap = Max. depth of cut
S = Connection screw size

Cat. No.	Grade AH725	No. of flutes	Helix angle	Dimensions (mm)							Wrench	Torque (N·m)
				øDc	ød1	ap	r	θc	S	L		
VRB100L07.0R05-02S06	●	2	15°	10	9.5	7	0.5	5°	S06	12.4	KEYV-S06	10
VRB100L07.0R10-02S06	●	2	15°	10	9.5	7	1.0	5°	S06	12.4		
VRB100L06.0R20-02S06	●	2	0°	10	9.2	6	2.0	7°	S06	12.4		
VRB120L05.7R30-02S06	●	2	0°	12	9.5	5.7	3.0	7°	S06	9.1		
VRB120L05.4R40-02S06	●	2	0°	12	9.5	5.4	4.0	7°	S06	9.1	KEYV-S08	15
VRB120L06.3R16-02S08	●	2	0°	12	11.5	5.9	1.6	7°	S08	11.1		
VRB120L06.2R20-02S08	●	2	0°	12	11.5	6.2	2.0	7°	S08	11.1		
VRB120L06.1R25-02S08	●	2	0°	12	11.5	5.8	2.5	7°	S08	11.1		
VRB120L06.1R30-02S08	●	2	0°	12	11.5	5.7	3.0	7°	S08	11.1	KEYV-S10	28
VRB120L05.9R40-02S08	●	2	0°	12	11.5	5.5	4.0	7°	S08	11.1		
VRB160L08.0R50-02S10	●	2	0°	16	15.2	8	5.0	7°	S10	20.2		
VRB200L11.1R30-02S12	●	2	0°	20	18.3	11	3.0	7°	S12	17.0		
VRB200L11.5R40-02S12	●	2	0°	20	18.3	11.3	4.0	7°	S12	17.3	KEYV-S12	28
VRB200L11.5R50-02S12	●	2	0°	20	18.3	11.3	5.0	7°	S12	17.3		
VRB200L11.4R60-02S12	●	2	0°	20	18.3	11.2	6.0	7°	S12	17.3		
VRB200L11.3R80-02S12	●	2	0°	20	18.3	11.1	8.0	7°	S12	17.3		

● Suitable for contouring operation

* Some heads require different size of wrench.

VRD

6
No. of
flutes

30°
Helix

7°
back taper
sided

Diameter
ø8~16mm



P
Steel

M
Stainless


K
Cast Iron

S
Superalloys

H
Hard
Materials



Radius Milling Pocketing Ramping Enlarging Hole

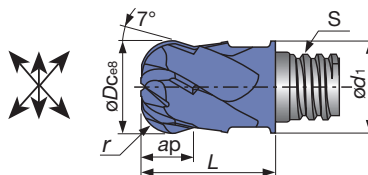

ap = Max. depth of cut
S = Connection screw size

Cat. No.	Grade	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
	AH725			øDc	ød1	ap	r	S	L		
VRD080L04.0R20-06S05	●	6	30°	8	7.7	4	2.0	S05	10.0	KEYV-S05	7
VRD100L05.0R30-06S06	●	6	30°	10	9.7	5	3.0	S06	13.0	KEYV-S06	10
VRD120L07.0R40-06S08	●	6	30°	12	11.7	7	4.0	S08	16.5	KEYV-S08	15
VRD160L09.0R50-06S10	●	6	30°	16	15.3	9	5.0	S10	20.5	KEYV-S10	28

● : Stocked items / Packing Quantity = 2 pcs.

Standard cutting conditions: Shoulder milling / Slotting
(VEE: 3 flutes, VED/VEE: 4 flutes, VEE-A, VEE-I, VEE-R, VEE-C, VRB, VRC, VRD)


Work materials	Hardness	Shoulder milling					Slot milling				
		Cutting speed Vc (m/min)	Tool diameter øDc (mm)	Feed per tooth fz (mm/t)	Depth of cut ap (mm)	Width of cut ae (mm)	Cutting speed Vc (m/min)	Tool diameter øDc (mm)	Feed per tooth fz (mm/t)	Depth of cut ap (mm)	
Low carbon steels S45C, S55C etc (C45, C55 etc)	~ 300 HB	130 (80-180)	ø6: 0.05 (0.03-0.07) ø8: 0.07 (0.05-0.09) ø10: 0.09 (0.07-0.12) ø12: 0.10 (0.08-0.13) ø16: 0.12 (0.09-0.15) ø20: 0.13 (0.10-0.17)	0.6 x øDc	0.25 x øDc	70 (50-100)	ø6: 0.03 (0.03-0.04) ø8: 0.03 (0.03-0.04) ø10: 0.04 (0.04-0.05) ø12: 0.05 (0.05-0.06) ø16: 0.07 (0.06-0.08) ø20: 0.08 (0.07-0.10)	0.5 x øDc	0.5 x øDc		
High carbon steels SCM440, SCr415 etc (42CrMo4, 15Cr3 etc)	~ 300 HB	100 (60-140)				60 (40-80)					
Prehardened steel PX5, NAK80 etc	30 ~ 40 HRC	90 (60-120)				50 (40-70)					
Stainless steels SUS304, SUS316 etc (X5CrNi18-9, X5CrNiMo17-12-2 etc)	~ 200 HB	70 (40-100)				40 (30-60)					
Grey cast irons FC250, FC300 etc (GG25, GG30 etc)	150 ~ 250 HB	140 (80-200)				80 (50-120)					
Ductile cast irons FCD400 etc (GGG40 etc)						130 (70-200)					
Aluminium alloys (Si < 13%)	-	300 (200-700)				200 (130-400)					
Aluminium alloys (Si ≥13%)	-	200 (100-300)				130 (70-200)					
Titanium alloys Ti-6Al-4V etc	-	60 (40-80)			0.05 x øDc	30 (20-40)		0.2 x øDc	0.2 x øDc		
Heat-resistant alloys Inconel 718 etc	-	30 (20-40)				15 (10-20)					
Hardened steel SKD61, SKT4 etc (X40CrMoV5 1, 55NiCrMoV6 etc)	40 ~ 50 HRC	60 (40-80)				40 (25-60)					
Hardened steel SKD11, SKH etc (X153CrMoV12, HS18-0-1 etc)	50 ~ 60 HRC	40 (20-60)				20 (10-30)					

Standard cutting conditions: Shoulder milling
(VED / VEE: 6 flutes, VED / VEE: 8, 10 flutes)

Work materials	Hardness (HRC)	Shoulder milling				
		Cutting speed Vc (m/min)	Tool diameter øDc (mm)	Feed per tooth fz (mm/t)	Depth of cut ap (mm)	Width of cut ae (mm)
Titanium alloys Ti-6Al-4V etc	-	90 (60 - 120)	ø8: 0.07 (0.05-0.09) ø10: 0.09 (0.07-0.12) ø12: 0.10 (0.08-0.13) ø16: 0.12 (0.09-0.15) ø20: 0.13 (0.10-0.17)	0.6 x øDc	0.6 x øDc	0.02 x øDc
Heat-resistant alloys Inconel 718 etc	-	40 (30 - 60)				
Hardened steel SKD61, SKT4 etc (X40CrMoV5 1, 55NiCrMoV6 etc)	40 ~ 50	120 (80 - 160)				
Hardened steel SKD11, SKH etc (X153CrMoV12, HS18-0-1 etc)	50 ~ 60	60 (40 - 90)				



For high feed milling

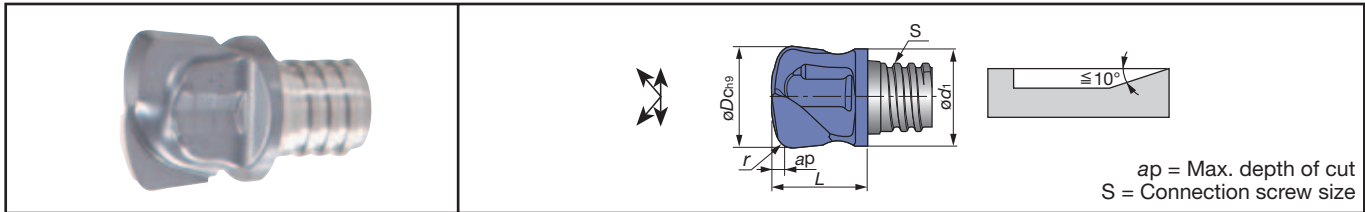

ap = Max. depth of cut
S = Connection screw size

Cat. No.	Grade	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
	AH725			øDc	ød1	ap	r ⁽¹⁾	S	L		
VFX100L00.6R20-02S06	●	2	0°	10	9.6	0.6	2.0	S06	12.5	KEYV-S06	10
VFX120L01.0R25-02S08	●	2	0°	12	11.5	1.0	2.5	S08	11.1	KEYV-S08	15
VFX160L01.1R30-02S10	●	2	0°	16	15.2	1.1	3.0	S10	20.0	KEYV-S10	28
VFX200L01.5R33-02S12	●	2	0°	20	18.3	1.5	3.3	S12	17.5	KEYV-S12	28

(1) When using CAD/CAM, please program as this radius.

Note: For VFX head, Taper neck shank or Tungsten shank should be recommended.

● : Stocked items / Packing Quantity = 2 pcs.

Standard cutting conditions: Pocketing with high feed (VFX)

Work materials	Hardness	Cutting speed Vc (m/min)	ø10		ø12		ø16		ø20		Width of cut ae (mm)
			Feed per tooth fz (mm/t)	Depth of cut ap (mm)	Feed per tooth fz (mm/t)	Depth of cut ap (mm)	Feed per tooth fz (mm/t)	Depth of cut ap (mm)	Feed per tooth fz (mm/t)	Depth of cut ap (mm)	
Low carbon steels S45C, S55C etc (C45, C55 etc)	~ 300 HB	150 (100-200)	0.5 (0.3-0.7)	0.5	0.6 (0.4-0.8)	0.5	0.7 (0.5-0.9)	0.75	0.8 (0.6-1.0)	1.0	0.6 x øDc
High carbon steels SCM440, SCr415 etc (42CrMo4, 15Cr3 etc)	~ 300 HB	130 (80-180)	0.4 (0.2-0.6)	0.5	0.5 (0.3-0.7)	0.5	0.6 (0.4-0.8)	0.75	0.7 (0.5-0.9)	1.0	0.6 x øDc
Prehardened steel PX5, NAK80 etc	30 ~ 40 HRC	120 (80-160)	0.3 (0.2-0.5)	0.4	0.3 (0.2-0.5)	0.4	0.4 (0.3-0.6)	0.5	0.4 (0.3-0.6)	0.75	0.6 x øDc
Stainless steels SUS304, SUS316 etc (X5CrNi18-9, X5CrNiMo17-12-2 etc)	~ 200 HB	80 (60-100)	0.4 (0.2-0.6)	0.4	0.4 (0.2-0.6)	0.4	0.5 (0.3-0.7)	0.5	0.5 (0.3-0.7)	0.75	0.6 x øDc
Grey cast irons FC250, FC300 etc (GG25, GG30 etc)	150 ~ 250 HB	160 (100-220)	0.5 (0.3-0.7)	0.5	0.6 (0.4-0.8)	0.75	0.7 (0.5-0.9)	0.75	0.8 (0.6-1.0)	1.0	0.6 x øDc
Ductile cast irons FCD400 etc (GGG40 etc)			0.4 (0.2-0.6)	0.5	0.5 (0.3-0.7)	0.75	0.6 (0.4-0.8)	0.75	0.7 (0.5-0.9)	1.0	0.6 x øDc
Titanium alloys Ti-6Al-4V etc	-	60 (40-80)	0.3 (0.2-0.5)	0.4	0.3 (0.2-0.5)	0.4	0.4 (0.2-0.6)	0.5	0.4 (0.2-0.6)	0.5	0.25 x øDc
Heat-resistant alloys Inconel 718 etc	-	30 (20-40)	0.2 (0.1-0.3)	0.3	0.2 (0.1-0.3)	0.3	0.2 (0.1-0.3)	0.4	0.2 (0.1-0.3)	0.4	0.25 x øDc
Hardened steel SKD61, SKT4 etc (X40CrMoV5 1, 55NiCrMoV6 etc)	40~ 50 HRC	60 (40-80)	0.3 (0.2-0.4)	0.3	0.3 (0.2-0.4)	0.3	0.4 (0.3-0.5)	0.4	0.4 (0.3-0.5)	0.4	0.45 x øDc
Hardened steel SKD11, SKH etc (X153CrMoV12, HS18-0-1 etc)	50~ 60 HRC	40 (20-60)	0.15 (0.1-0.2)	0.2	0.15 (0.1-0.2)	0.2	0.2 (0.1-0.3)	0.3	0.2 (0.1-0.3)	0.3	0.25 x øDc

10

Endmills

TUNGMEISTER Heads of ball type

VBB-BM

2
No. of
flutes

0°
Helix

Diameter
Ø8~16mm

90°
With R

P
Steel

M
Stainless


K
Cast Iron

S
Superalloys

H
Hard
Materials



For general purpose

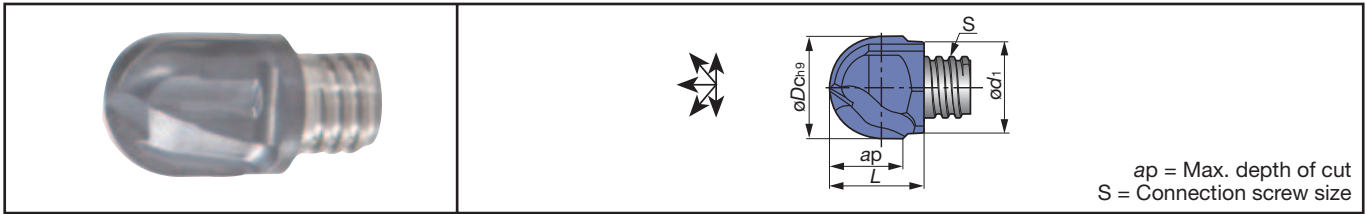

Cat. No.	Grade AH725	No. of flutes	Helix angle	Dimensions (mm)					Wrench	Torque (N·m)
				ØDc	Ød1	ap	S	L		
VBB080L08.0-BM-02S05	●	2	0°	8	7.6	8	S05	10.0	KEYV-S05	7
VBB100L10.0-BM-02S06	●	2	0°	10	9.5	10	S06	12.4	KEYV-S06	10
VBB120L12.0-BM-02S08	●	2	0°	12	11.5	11.5	S08	15.3	KEYV-S08	15
VBB160L16.0-BM-02S10	●	2	0°	16	15.2	16	S10	19.1	KEYV-S10	28

• For roughing

TUNGMEISTER Heads of ball type

VBB-BG

2
No. of
flutes

0°
Helix

Diameter
Ø8~16mm

90°
With R

P
Steel

M
Stainless


K
Cast Iron

S
Superalloys

H
Hard
Materials



For high precision

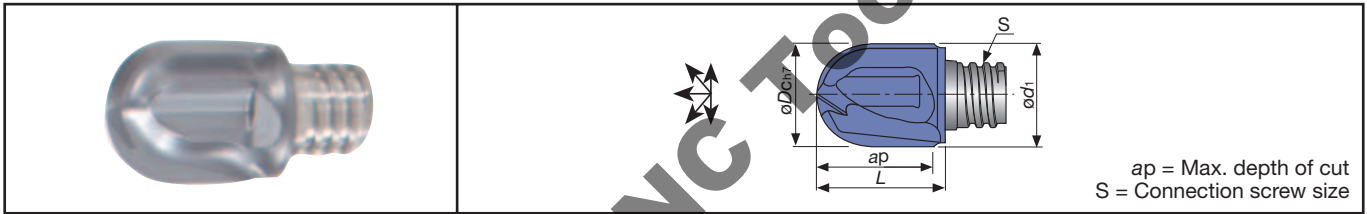

Cat. No.	Grade AH750	No. of flutes	Helix angle	Dimensions (mm)					Wrench	Torque (N·m)
				ØDc	Ød1	ap	S	L		
VBB080L08.0-BG-02S05	●	2	0°	8	7.6	8	S05	10.0	KEYV-S05	7
VBB100L10.0-BG-02S06	●	2	0°	10	9.6	10	S06	12.4	KEYV-S06	10
VBB120L12.0-BG-02S08	●	2	0°	12	11.5	12	S08	15.3	KEYV-S08	15
VBB160L16.0-BG-02S10	●	2	0°	16	15.2	16	S10	19.1	KEYV-S10	28

TUNGMEISTER Heads of ball type

VBD-BG

2
No. of
flutes

30°
Helix

Diameter
Ø8~16mm

90°
With R

P
Steel

M
Stainless


K
Cast Iron

S
Superalloys

H
Hard
Materials



For high precision

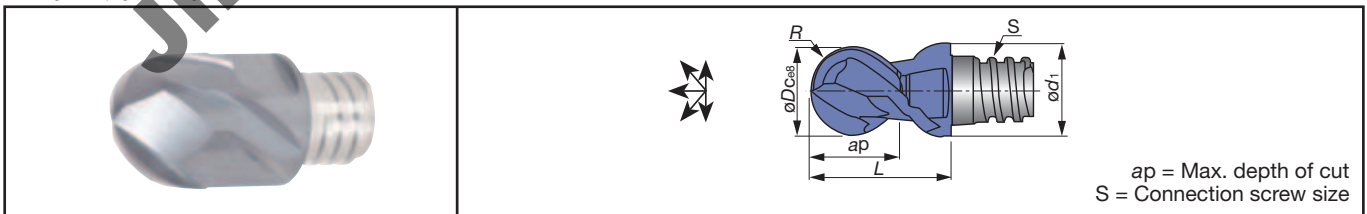

Cat. No.	Grade	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
	AH725			øDc	ød1	ap	R	S	L		
VBD080L05.0-BG-02S05	●	2	30°	8	7.7	5	3.982 ⁽¹⁾	S05	10.0	KEYV-S05	7
VBD100L07.0-BG-02S06	●	2	30°	10	9.7	7	4.982 ⁽¹⁾	S06	13.0	KEYV-S06	10
VBD120L09.0-BG-02S08	●	2	30°	12	11.7	9	5.978 ⁽²⁾	S08	16.5	KEYV-S08	15
VBD160L09.5-BG-02S10	●	2	30°	16	15.3	9	7.978 ⁽²⁾	S10	20.5	KEYV-S10	28

• The tolerance of R : (1) ± 0.010 (2) ± 0.012

● : Stocked items / Packing Quantity = 2 pcs.

10

Endmills

VBD / VBE-BG

4
No. of
flutes

30°/45°
Helix

Diameter
ø6~20mm

90°
With R

P
Steel

M
Stainless


K
Cast Iron

S
Superalloys

H
Hard
Materials



For high precision

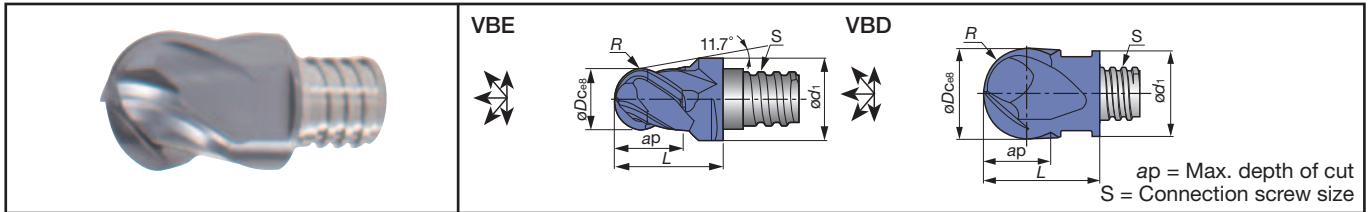

Cat. No.	Grade AH725	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
				øDc	ød1	ap	R	S	L		
VBE060L05.5-BG-04S05	●	4	45°	6	8.0	5.5	2.987 ⁽¹⁾	S05	10.0	KEYV-S05	7
VBD080L05.0-BG-04S05	●	4	30°	8	7.7	5	3.982 ⁽¹⁾	S05	10.0	KEYV-S05	7
VBD100L07.0-BG-04S06	●	4	30°	10	9.7	7	4.982 ⁽¹⁾	S06	13.0	KEYV-S06	10
VBD120L09.0-BG-04S08	●	4	30°	12	11.7	9	5.978 ⁽²⁾	S08	16.5	KEYV-S08	15
VBD160L12.0-BG-04S10	●	4	30°	16	15.3	12	7.978 ⁽²⁾	S10	20.5	KEYV-S10	28
VBD200L15.0-BG-04S12	●	4	30°	20	18.3	15	9.972 ⁽²⁾	S12	25.5	KEYV-S12	28

• The tolerance of R : (1) ± 0.010 (2) ± 0.012

VBB-SG

2
No. of
flutes

0°
Helix

Diameter
ø10~20mm

90°
With R

P
Steel

M
Stainless

K
Cast Iron

S
Superalloys

H
Hard
Materials



Spherical designed edge



Cat. No.	Grade AH725	No. of flutes	Helix angle	Dimensions (mm)					Wrench	Torque (N·m)
				øDc	ød1	ap	S	L		
VBB100L08.0-SG-02S05	●	2	0°	10	7.6	8	S05	10.1	KEYV-S05	7
VBB120L09.6-SG-02S06	●	2	0°	12	9.6	9.6	S06	11.6	*KEYV-S08	10
VBB160L12.9-SG-02S08	●	2	0°	16	11.5	12.9	S08	15.4	*KEYV-S10	15
VBB200L16.1-SG-02S10	●	2	0°	20	15.2	16.1	S10	18.5	KEYV-S10	28

• For pull-cutting on the vertical wall

* Some heads require different size of wrench.

VBE-BGA


2
No. of
flutes

45°
Helix

Diameter
ø8~20mm

90°
With R

N
Non-ferrous



For aluminium machining



Cat. No.	Grade KS15F	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
				øDc	ød1	ap	R	S	L		
VBE080L05.0-BGA02S05	●	2	45°	8	7.7	5	3.982 ⁽¹⁾	S05	10.0	KEYV-S05	7
VBE100L07.0-BGA02S06	●	2	45°	10	9.7	7	4.982 ⁽¹⁾	S06	13.0	KEYV-S06	10
VBE120L09.0-BGA02S08	●	2	45°	12	11.7	9	5.987 ⁽²⁾	S08	16.5	KEYV-S08	15
VBE160L12.0-BGA02S10	●	2	45°	16	15.3	12	7.978 ⁽²⁾	S10	20.5	KEYV-S10	28
VBE200L15.0-BGA02S12	●	2	45°	20	18.3	15	9.972 ⁽²⁾	S12	25.5	KEYV-S12	28

• The tolerance of R : (1) ± 0.010 (2) ± 0.012


● : Stocked items / Packing Quantity = 2 pcs.

Standard cutting conditions: Profiling (VBB-BM / BG / SG, VBD-BG, VBE-BGA)


Work materials	Hardness	Profiling (for roughing)					Profiling (for semi-finishing and finishing)											
		Cutting speed V_c (m/min)	Tool diameter ϕD_c (mm)	Feed per tooth f_z (mm/t)	Depth of cut a_p (mm)	Pick feed P_f (mm)	Cutting speed V_c (m/min)	Tool diameter ϕD_c (mm)	Feed per tooth f_z (mm/t)	Depth of cut a_p (mm)	Pick feed P_f (mm)							
Low carbon steels S45C, S55C etc (C45, C55 etc)	~ 300 HB	150 (100-200)	$\phi 6$: 0.05 (0.03-0.07) $\phi 8$: 0.06 (0.04-0.08) $\phi 10$: 0.07 (0.05-0.10) $\phi 12$: 0.08 (0.06-0.11) $\phi 16$: 0.09 (0.07-0.13) $\phi 20$: 0.11 (0.08-0.15)	$0.3 \times \phi D_c$	$0.4 \times \phi D_c$	$0.2 \times \phi D_c$	180 (120-250)	$\phi 6$: 0.06 (0.04-0.09) $\phi 8$: 0.08 (0.06-0.11) $\phi 10$: 0.09 (0.07-0.12) $\phi 12$: 0.10 (0.08-0.13) $\phi 16$: 0.12 (0.09-0.16) $\phi 20$: 0.14 (0.10-0.18)	$0.1 \times \phi D_c$	$0.15 \times \phi D_c$								
High carbon steels SCM440, SCr415 etc (42CrMo4, 15Cr3 etc)	~ 300 HB	130 (80-180)					160 (100-220)											
Prehardened steel PX5, NAK80 etc	30 ~ 40 HRC	120 (80-160)					150 (100-200)											
Stainless steels SUS304, SUS316 etc (X5CrNi18-9, X5CrNiMo17-12-2 etc)	~ 200 HB	80 (60-100)					100 (80-120)											
Grey cast irons FC250, FC300 etc (GG25, GG30 etc)	150 ~ 250 HB	160 (100-220)					200 (120-280)											
Ductile cast irons FCD400 etc (GGG40 etc)																		
Aluminium alloys (Si < 13%)	-	300 (200-700)					500 (300-1000)											
Aluminium alloys (Si \geq 13%)	-	200 (100-300)					300 (150-400)											
Titanium alloys Ti-6Al-4V etc	-	60 (40-80)					70 (50-100)											
Heat-resistant alloys Inconel 718 etc	50~ 60 HRC	30 (20-40)					40 (30-50)											
Hardened steel SKD61, SKT4 etc (X40CrMoV5 1, 55NiCrMoV6 etc)	-	60 (40-80)					70 (50-100)											
Hardened steel SKD11, SKH etc (X153CrMoV12, HS18-0-1 etc)	50~ 60 HRC	40 (20-60)					50 (30-80)											

10

Endmills



For spot drilling, chamfering and countersinking

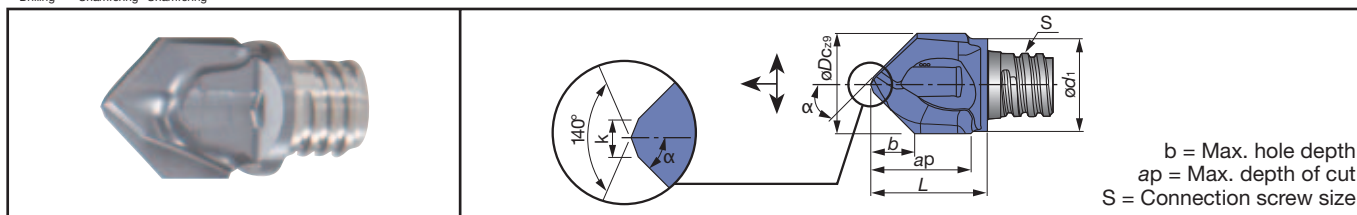

b = Max. hole depth
ap = Max. depth of cut
S = Connection screw size

Point angle = 60°

Cat. No.	Grade	No. of flutes	Helix angle	Dimensions (mm)								Wrench	Torque (N·m)
	AH725			ØDc	Ød1	ap	b	S	L	k	α		
VCP100L09.5A30-02S06	●	2	0°	10.0	9.5	8.5	7.5	S06	11.75	1.5	30°	KEYV-S06	10
VCP120L12.0A30-02S08	●	2	0°	12.0	11.5	11	9.2	S08	15.4	1.5	30°	KEYV-S08	15
VCP160L15.0A30-02S10	●	2	0°	16.0	15.2	16	12.0	S10	20.2	2.5	30°	KEYV-S10	28

● Min. chamfering: Ø1.5 mm

Point angle = 90°

Cat. No.	Grade	No. of flutes	Helix angle	Dimensions (mm)								Wrench	Torque (N·m)
	AH725			ØDc	Ød1	ap	b	S	L	k	α		
VCP080L07.7A45-02S05	●	2	0°	8.0	7.6	7.5	3.7	S05	9.75	1.0	45°	KEYV-S05	7
VCP083L07.9A45-02S05	●	2	0°	8.3	7.6	7.5	3.8	S05	10.0	1.0	45°		
VCP100L09.0A45-02S06	●	2	0°	10.0	9.5	9.5	4.4	S06	11.75	1.5	45°	KEYV-S06	10
VCP104L09.0A45-02S06 ⁽¹⁾	●	2	0°	10.4	9.5	9.5	4.6	S06	11.75	1.5	45°		
VCP120L12.0A45-02S08	●	2	0°	12.0	11.5	11.5	5.4	S08	15.4	1.5	45°	KEYV-S08	15
VCP124L12.0A45-02S08 ⁽¹⁾	●	2	0°	12.4	11.5	11.5	5.6	S08	15.4	1.5	45°		
VCP160L15.0A45-02S10	●	2	0°	16.0	15.2	16	7.1	S10	18.8	1.5	45°	KEYV-S10	28
VCP165L15.0A45-02S10	●	2	0°	16.5	15.2	16	7.1	S10	18.8	1.5	45°		

● Min. chamfering: Ø1.5 mm

Point angle = 120°


Cat. No.	Grade	No. of flutes	Helix angle	Dimensions (mm)								Wrench	Torque (N·m)
	AH725			ØDc	Ød1	ap	b	S	L	k	α		
VCP100L09.5A60-02S06	●	2	0°	10.0	9.5	9.5	2.7	S06	12.7	1.5	60°	KEYV-S06	10
VCP120L12.0A60-02S08	●	2	0°	12.0	11.5	11.5	3.3	S08	15.2	1.5	60°	KEYV-S08	15
VCP160L15.5A60-02S10	●	2	0°	16.0	15.2	16	4.4	S10	19.9	1.5	60°	KEYV-S10	28

● Min. chamfering: Ø1.5 mm

● : Stocked items / Packing Quantity = 2 pcs.



For center drilling (DIN332)

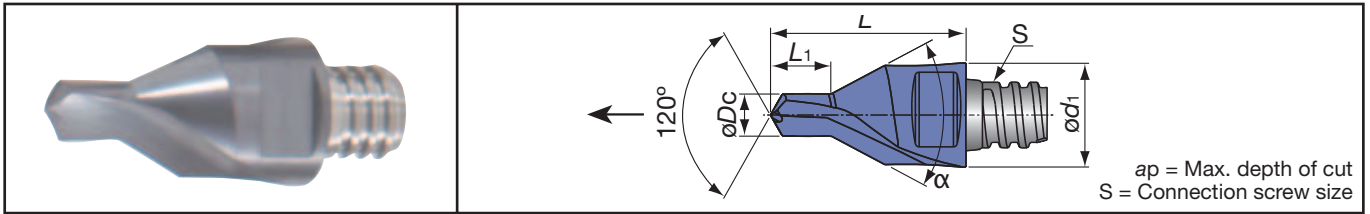


Cat. No.	Grade	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
	AH725			øDc	ød1	L1	S	L	α		
VDP328L04.6A30-02S05	●	2	-	3.28	8	4.6	S05	15.0	59.5°	KEYV-S05	7
VDP412L05.9A30-02S06	●	2	-	4.12	10	5.9	S06	19.0	59.5°	KEYV-S06	10
VDP513L07.2A30-02S08	●	2	-	5.13	12	7.2	S08	23.0	59.5°	KEYV-S08	15
VDP646L08.9A30-02S10	●	2	-	6.46	16	8.9	S10	28.0	59.5°	KEYV-S10	28

Standard cutting conditions: Drilling (VCP, VDP)

Work materials	Hardness	Cutting speed Vc (m/min)	Feed: f (mm/rev)				
			VDP328	VDP412	VDP513	VDP646	VCP
Low carbon steels S45C, S55C etc (C45, C55 etc)	~ 300 HB	60 (40-80)	0.06 (0.04-0.08)	0.07 (0.05-0.10)	0.07 (0.05-0.10)	0.09 (0.06-0.12)	0.09 (0.06-0.12)
High carbon steels SCM440, SCr415 etc (42CrMo4, 15Cr3 etc)	~ 300 HB	40 (30-50)	0.06 (0.04-0.08)	0.07 (0.05-0.10)	0.07 (0.05-0.10)	0.09 (0.06-0.12)	0.09 (0.06-0.12)
Prehardened steel PX5, NAK80 etc	30 ~ 40 HRC	25 (20-30)	0.06 (0.04-0.08)	0.07 (0.05-0.10)	0.07 (0.05-0.10)	0.09 (0.06-0.12)	0.09 (0.06-0.12)
Stainless steels SUS304, SUS316 etc (X5CrNi18-9, X5CrNiMo17-12-2 etc)	~ 200 HB	20 (15-25)	0.06 (0.04-0.08)	0.07 (0.05-0.10)	0.07 (0.05-0.10)	0.09 (0.06-0.12)	0.09 (0.06-0.12)
Grey cast irons FC250, FC300 etc (GG25, GG30 etc)	150 ~ 250 HB	80 (60-100)	0.07 (0.05-0.09)	0.09 (0.07-0.12)	0.09 (0.07-0.12)	0.15 (0.12-0.18)	0.15 (0.12-0.18)
Ductile cast irons FCD400 etc (GGG40 etc)			0.06 (0.04-0.08)	0.07 (0.05-0.10)	0.07 (0.05-0.10)	0.12 (0.10-0.15)	0.12 (0.10-0.15)
Titanium alloys Ti-6Al-4V etc	-	20 (15-25)	0.05 (0.04-0.07)	0.05 (0.04-0.07)	0.05 (0.04-0.07)	0.05 (0.04-0.07)	0.05 (0.04-0.07)
Heat-resistant alloys Inconel 718 etc	-	15 (10-20)	0.04 (0.03-0.06)	0.04 (0.03-0.06)	0.04 (0.03-0.06)	0.04 (0.03-0.06)	0.04 (0.03-0.06)
Hardened steel SKD61, SKT4 etc (X40CrMoV5.1, 55NiCrMoV6 etc)	40~ 50 HRC	20 (15-25)	0.05 (0.04-0.07)	0.05 (0.04-0.07)	0.05 (0.04-0.07)	0.05 (0.04-0.07)	0.05 (0.04-0.07)
Hardened steel SKD11, SKH etc (X153CrMoV12, HS18-0-1 etc)	50~ 60 HRC	15 (10-20)	0.04 (0.03-0.06)	0.04 (0.03-0.06)	0.04 (0.03-0.06)	0.04 (0.03-0.06)	0.04 (0.03-0.06)



For counter boring
corner radii: $r = 0.2 \sim 2.0 \text{ mm}$

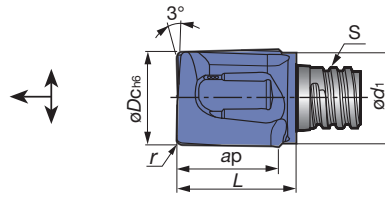

ap = Max. depth of cut
S = Connection screw size

Cat. No.	Grade	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
	AH725			øDc	ød1	ap	r	S	L		
VGC078L08.0R02-02S05	●	2	10°	7.8	7.6	8	0.2	S05	10.0	KEYV-S05	7
VGC080L08.0R04-02S05	●	2	10°	8.0	7.6	8	0.4	S05	10.0		
VGC080L08.0R10-02S05	●	2	10°	8.0	7.6	8	1.0	S05	10.0		
VGC080L08.0R20-02S05	●	2	10°	8.0	7.6	8	2.0	S05	10.0		
VGC098L09.0R03-02S06	●	2	10°	9.8	9.5	9.5	0.3	S06	12.4	KEYV-S06	10
VGC100L09.0R04-02S06	●	2	10°	10.0	9.5	9.5	0.4	S06	12.4		
VGC100L09.0R10-02S06	●	2	10°	10.0	9.5	9.5	1.0	S06	12.4		
VGC100L09.0R20-02S06	●	2	10°	10.0	9.5	9.5	2.0	S06	12.4		
VGC117L10.0R03-02S08	●	2	10°	11.7	11.5	10	0.3	S08	14.2	KEYV-S08	15
VGC120L10.0R04-02S08	●	2	10°	12.0	11.5	10	0.4	S08	14.2		
VGC120L10.0R10-02S08	●	2	10°	12.0	11.5	10	1.0	S08	14.2		
VGC120L10.0R20-02S08	●	2	10°	12.0	11.5	10	2.0	S08	14.2		
VGC157L15.0R03-02S10	●	2	10°	15.7	15.2	15	0.3	S10	19.0	KEYV-S10	28
VGC160L15.0R04-02S10	●	2	10°	16.0	15.2	15	0.4	S10	19.0		
VGC160L15.0R08-02S10	●	2	10°	16.0	15.2	15	0.8	S10	19.0		

● Can drill with step feed

● : Stocked items / Packing Quantity = 2 pcs.

Standard cutting conditions: Counter boring (VGC)

Work materials	Hardness	Cutting speed Vc (m/min)	Feed f (mm/rev)
Low carbon steels S45C, S55C etc (C45, C55 etc)	~ 300 HB	60 (40-80)	0.06 (0.04-0.08)
High carbon steels SCM440, SCr415 etc (42CrMo4, 15Cr3 etc)	~ 300 HB	40 (30-50)	0.06 (0.04-0.08)
Prehardened steel PX5, NAK80 etc	30 ~ 40 HRC	25 (20-30)	0.06 (0.04-0.08)
Stainless steels SUS304, SUS316 etc (X5CrNi18-9, X5CrNiMo17-12-2 etc)	~ 200 HB	20 (15-25)	0.06 (0.04-0.08)
Grey cast irons FC250, FC300 etc (GG25, GG30 etc)	150 ~ 250 HB	80 (60-100)	0.07 (0.05-0.09)
Ductile cast irons FCD400 etc (GGG40 etc)			0.06 (0.04-0.08)
Titanium alloys Ti-6Al-4V etc	-	20 (15-25)	0.05 (0.04-0.07)
Heat-resistant alloys Inconel 718 etc	-	15 (10-20)	0.04 (0.03-0.06)
Hardened steel SKD61, SKT4 etc (X40CrMoV5 1, 55NiCrMoV6 etc)	40 ~ 50 HRC	20 (15-25)	0.05 (0.04-0.07)
Hardened steel SKD11, SKH etc (X153CrMoV12, HS18-0-1 etc)	50 ~ 60 HRC	15 (10-20)	0.04 (0.03-0.06)

- When drilling, the step feed (woodpeckering feed) operation should be applied with the depth of 0.3 - 0.5 mm per step.
- Apply the same cutting conditions as the VEE type head when conducting shoulder milling or slotting operations.

TUNGMEISTER Heads of chamfering type

VCA

4/6
No. of
flutes

0°
Helix

Diameter
ø10~20mm

45°
Chamfering


P
Steel

M
Stainless


K
Cast Iron

S
Superalloys

H
Hard
Materials



Chamfering and countersinking (without center edge)

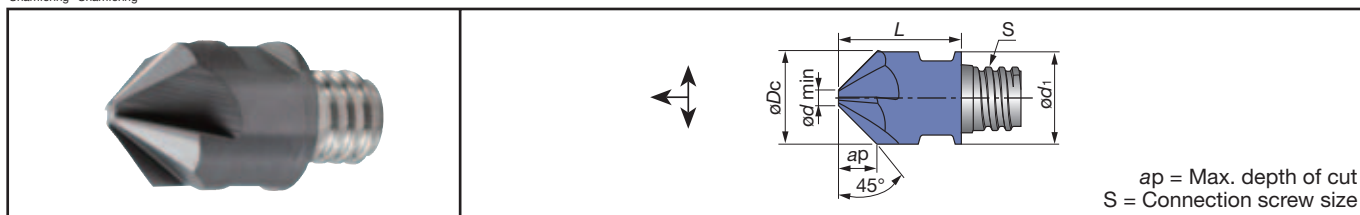

Cat. No.	Grade AH725	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
				øDc	ød1	ap	ødmin	S	L		
VCA100L04.0A45-04S06	●	4	0°	10.0	10.0	4	1.95	S06	13.00	KEYV-S06	10
VCA120L05.0A45-04S08	●	4	0°	12.0	12.0	5	1.95	S08	16.50	KEYV-S08	15
VCA127L05.3A45-04S08	●	4	0°	12.7	12.7	5.3	1.98	S08	16.50	KEYV-S08	15
VCA160L06.5A45-06S10	●	6	0°	16.0	16.0	6.5	3.00	S10	20.30	KEYV-S10	28
VCA200L07.5A45-06S12	●	6	0°	20.0	18.3	7.5	5.00	S12	25.50	KEYV-S12	28

TUNGMEISTER Heads of chamfering type

VCW

2
No. of
flutes

0°
Helix

Diameter
ø11.8mm

45°
Chamfering


P
Steel

M
Stainless


K
Cast Iron

S
Superalloys

H
Hard
Materials



For double chamfering

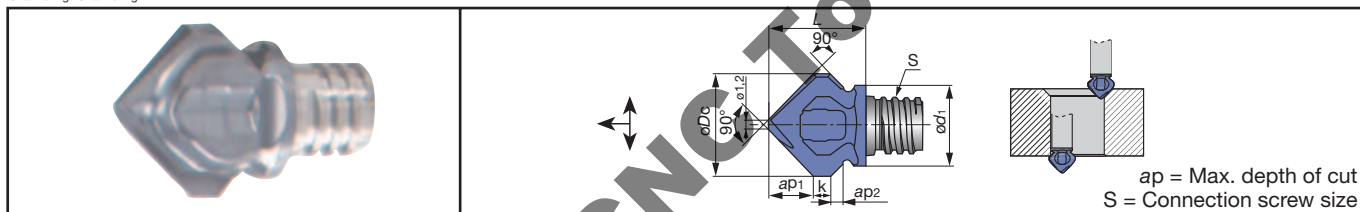

Cat. No.	Grade	No. of flutes	Helix angle	Dimensions (mm)							Wrench	Torque (N·m)
	AH725			øDc	ød1	ap1	ap2	k	S	L		
VCW118L05.0A45-02S06	●	2	0°	11.8	9.3	5.0	1.2	2.0	S06	11.20	*KEYV-S08	10

- Available for chamfering of reverse side
- * Some heads require different size of wrench.

TUNGMEISTER Heads of chamfering type

VCR

2
No. of
flutes

0°
Helix

Diameter
ø8~20mm

R
Chamfering


P
Steel

M
Stainless

K
Cast Iron

S
Superalloys

H
Hard
Materials



For concave radii milling



Cat. No.	Grade	No. of flutes	Helix angle	Dimensions (mm)							Wrench	Torque (N·m)
	AH725			øDc	ød1	ød	ap	r	S	L		
VCR080L07.5R10-02S05	●	2	0°	8.0	7.6	5.8	7.5	1.0	S05	10.5	KEYV-S05	7
VCR100L09.5R16-02S06	●	2	0°	10.0	9.5	6.8	9.5	1.6	S06	12.5	KEYV-S06	10
VCR100L09.5R25-02S06	●	2	0°	10.0	9.5	5.1	9.5	2.5	S06	12.5		
VCR127L12.0R30-02S08	●	2	0°	12.7	12.2	6.5	12	3.0	S08	15.6	KEYV-S08	15
VCR127L12.0R40-02S08	●	2	0°	12.7	12.2	4.7	12	4.0	S08	15.6		
VCR160L15.0R50-02S10	●	2	0°	16.0	15.2	6.2	15	5.0	S10	19.1	KEYV-S10	28
VCR200L07.0R60-02S12	●	2	0°	20.0	18.3	8.0	7.0	6.0	S12	17.4	KEYV-S12	28

Standard cutting conditions: Chamfering and countersinking (VCA, VCW, VCR, VCP)

Work materials	Hardness	Cutting speed Vc (m/min)	Feed per tooth fz (mm/t)
Low carbon steels S45C, S55C etc (C45, C55 etc)	~ 300 HB	80 (60-100)	0.09 (0.06-0.12)
High carbon steels SCM440, SCr415 etc (42CrMo4, 15Cr3 etc)	~ 300 HB	60 (50-80)	0.09 (0.06-0.12)
Prehardened steel PX5, NAK80 etc	30 ~ 40 HRC	50 (40-70)	0.09 (0.06-0.12)
Stainless steels SUS304, SUS316 etc (X5CrNi18-9, X5CrNiMo17-12-2 etc)	~ 200 HB	40 (30-50)	0.09 (0.06-0.12)
Grey cast irons FC250, FC300 etc (GG25, GG30 etc)	150 ~ 250 HB	100 (80-120)	0.09 (0.06-0.12)
Ductile cast irons FCD400 etc (GGG40 etc)			0.09 (0.06-0.12)
Aluminium alloys	-	150 (100-200)	0.1 (0.08-0.15)
Titanium alloys Ti-6Al-4V etc	-	40 (30-50)	0.07 (0.05-0.10)
Heat-resistant alloys Inconel 718 etc	-	30 (20-40)	0.06 (0.04-0.08)
Hardened steel SKD61, SKT4 etc (X40CrMoV5 1, 55NiCrMoV6 etc)	40 ~ 50 HRC	40 (30-50)	0.07 (0.05-0.10)
Hardened steel SKD11, SKH etc (X153CrMoV12, HS18-0-1 etc)	50 ~ 60 HRC	30 (20-40)	0.06 (0.04-0.08)


Tolerance of tool diameter

Basic dimensions (mm)		Permissible dimensional deviations (μm)						
>	≤	e8	e9	h6	h7	h9	h10	z9
6	10	-25 -47	-25 -61	0 -9	0 -15	0 -36	0 -58	+78 +42
10	14	-32 -59	-32 -75	0 -11	0 -18	0 -43	0 -70	+93 +50
14	18	-32 -59	-32 -75	0 -11	0 -18	0 -43	0 -70	+103 +60
18	30	-40 -73	-40 -92	0 -13	0 -21	0 -52	0 -84	-

● JISB0401-2: 1998 (ISO286-2: 1988) extract



For slotting

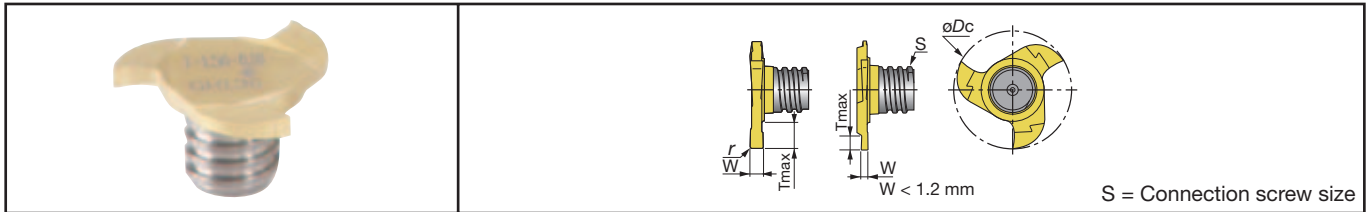


Cat. No.	Grade	No. of flutes	Helix angle	Dimensions (mm)					Wrench	Torque (N·m)
	GH130			ØDc	W±0.02	r	S	Tmax		
VST157W1.50R010-3S06	●	3	-	15.7	1.50	0.10	S06	2.8	KEYV-177	10
VST157W1.57R020-3S06	●	3	-	15.7	1.57	0.20	S06	2.8		
VST157W2.00R020-3S06	●	3	-	15.7	2.00	0.20	S06	2.8		
VST157W2.39R020-3S06	●	3	-	15.7	2.39	0.20	S06	2.8		
VST157W2.50R020-3S06	●	3	-	15.7	2.50	0.20	S06	2.8		
VST157W3.00R020-3S06	●	3	-	15.7	3.00	0.20	S06	2.8		
VST157W3.17R020-3S06	●	3	-	15.7	3.17	0.20	S06	2.8		
VST177W1.20R005-3S06	●	3	-	17.7	1.20 ⁽¹⁾	0.05	S06	3.8		
VST177W1.40R005-3S06	●	3	-	17.7	1.40 ⁽¹⁾	0.05	S06	3.8		
VST177W1.50R010-3S06	●	3	-	17.7	1.50	0.10	S06	3.8		
VST177W1.57R020-3S06	●	3	-	17.7	1.57	0.20	S06	3.8		
VST177W1.70R005-3S06	●	3	-	17.7	1.70 ⁽¹⁾	0.05	S06	3.8		
VST177W2.00R020-3S06	●	3	-	17.7	2.00	0.20	S06	3.8		
VST177W2.20R110-3S06	●	3	-	17.7	2.20	1.10	S06	3.8		
VST177W2.39R020-3S06	●	3	-	17.7	2.39	0.20	S06	3.8		
VST177W2.50R020-3S06	●	3	-	17.7	2.50	0.20	S06	3.8		
VST177W3.00R020-3S06	●	3	-	17.7	3.00	0.20	S06	3.8		
VST177W3.17R020-3S06	●	3	-	17.7	3.17	0.20	S06	3.8		

(1) W is based on DIN471 / 472

● : Stocked items / Packing Quantity = 2 pcs.



For slotting

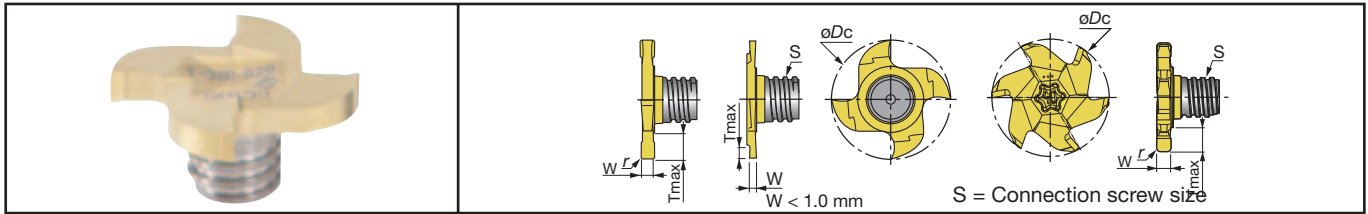


Cat. No.	Grade GH130	No. of flutes	Helix angle	Dimensions (mm)					Wrench	Torque (N·m)
				øDc	W±0.02	r	S	Tmax		
VST217W0.76R000-4S08	●	4	-	21.7	0.76 ⁽¹⁾	0.00	S08	1.5	KEYV-217	15
VST217W0.86R000-4S08	●	4	-	21.7	0.86 ⁽¹⁾	0.00	S08	1.7		
VST217W0.96R000-4S08	●	4	-	21.7	0.96 ⁽¹⁾	0.00	S08	1.9		
VST217W1.00R005-4S08	●	4	-	21.7	1.00	0.05	S08	2.0		
VST217W1.20R005-4S08	●	4	-	21.7	1.20 ⁽¹⁾	0.05	S08	4.5		
VST217W1.40R005-4S08	●	4	-	21.7	1.40 ⁽¹⁾	0.05	S08	4.5		
VST217W1.57R000-4S08	●	4	-	21.7	1.57	0.00	S08	4.5		
VST217W1.70R010-4S08	●	4	-	21.7	1.70 ⁽¹⁾	0.10	S08	4.5		
VST217W1.95R020-4S08	●	4	-	21.7	1.95 ⁽¹⁾	0.20	S08	4.5		
VST217W2.00R020-4S08	●	4	-	21.7	2.00	0.20	S08	4.5		
VST217W2.25R020-4S08	●	4	-	21.7	2.25 ⁽¹⁾	0.20	S08	4.5		
VST217W2.39R020-4S08	●	4	-	21.7	2.39	0.20	S08	4.5		
VST217W2.50R020-4S08	●	4	-	21.7	2.50	0.20	S08	4.5		
VST217W2.75R020-4S08	●	4	-	21.7	2.75 ⁽¹⁾	0.20	S08	4.5		
VST217W3.00R020-4S08	●	4	-	21.7	3.00	0.20	S08	4.5		
VST217W3.17R020-4S08	●	4	-	21.7	3.17	0.20	S08	4.5		
VST217W3.25R020-4S08	●	4	-	21.7	3.25 ⁽¹⁾	0.20	S08	4.5		
VST217W4.00R020-4S08	●	4	-	21.7	4.00	0.20	S08	4.5		
VST217W4.25R020-4S08	●	4	-	21.7	4.25 ⁽¹⁾	0.20	S08	4.5		
VST217W4.75R020-4S08	●	4	-	21.7	4.75	0.20	S08	4.5		
VST217W5.25R020-4S08	●	4	-	21.7	5.25 ⁽¹⁾	0.20	S08	4.5	KEYV-T40L	28
VST277W2.50R020-6S10	●	6	-	27.7	2.50	0.20	S10	6.0		
VST277W5.25R020-6S10	●	6	-	27.7	5.25	0.20	S10	6.0		
VST277W10.0R020-6S10	●	6	-	27.7	10.00	0.20	S10	6.0		


(1) W is based on DIN471 / 472

10

Endmills



For chamfering

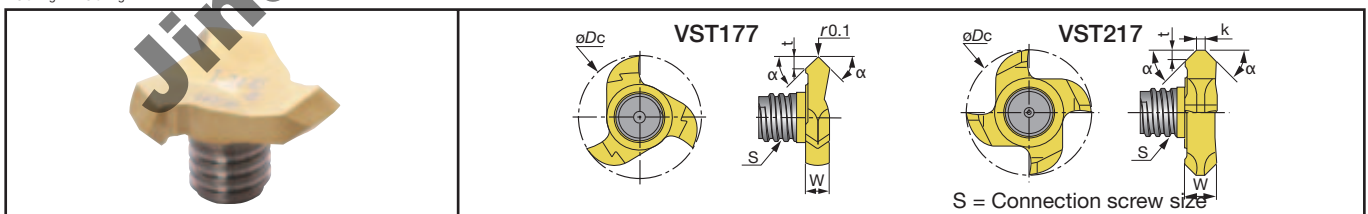


Cat. No.	Grade GH130	No. of flutes	Helix angle	Dimensions (mm)						Wrench	Torque (N·m)
				øDc	W	α	S	t	k		
VST177L01.40A45-3S06	●	3	-	17.7	3.40	45°	S06	1.4	-	KEYV-177	10
VST217L01.70A45-4S08	●	4	-	21.7	5.50	45°	S08	1.7	1.5	KEYV-217	15

● : Stocked items / Packing Quantity = 2 pcs.



For slotting

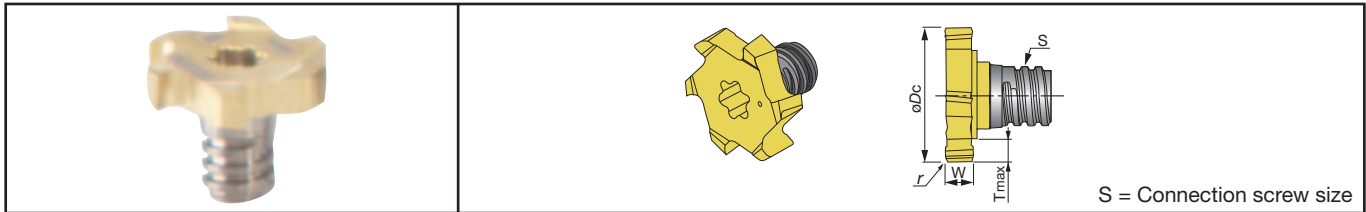


Cat. No.	Grade	No. of flutes	Helix angle	Dimensions (mm)					Wrench	Torque (N·m)	
	GH130			øDc _{0^{-0.05}}	W±0.02	Tmax	S	r			
VTB135W3.00R04-06S05	●	6	-	13.5	3	2.65	S05	0.4	KEYV-T20	7	
VTB135W4.00R04-06S05	●	6	-	13.5	4	2.65	S05	0.4			
VTB160W2.00R04-06S06	●	6	-	16.0	2	3.00	S06	0.4	KEYV-T25	10	
VTB160W3.00R04-06S06	●	6	-	16.0	3	3.00	S06	0.4			
VTB160W4.00R04-06S06	●	6	-	16.0	4	3.00	S06	0.4			
VTB165W2.00R04-06S06	●	6	-	16.5	2	3.25	S06	0.4	KEYV-T20		
VTB165W3.00R04-06S06	●	6	-	16.5	3	3.25	S06	0.4	KEYV-T25		
VTB165W4.00R04-06S06	●	6	-	16.5	4	3.25	S06	0.4			
VTB195W4.00R04-06S08	●	6	-	19.5	4	3.45	S08	0.4	KEYV-T30L	15	
VTB195W5.00R04-06S08	●	6	-	19.5	5	3.45	S08	0.4			
VTB195W6.00R04-06S08	●	6	-	19.5	6	3.45	S08	0.4			
VTB225W5.00R04-06S08	●	6	-	22.5	5	4.95	S08	0.4	KEYV-T40L		
VTB225W6.00R04-06S08	●	6	-	22.5	6	4.95	S08	0.4			
VTB225W8.00R04-06S08	●	6	-	22.5	8	4.95	S08	0.4			
VTB250W6.00R04-06S08	●	6	-	25.0	6	5.90	S08	0.4	KEYV-T50L	28	
VTB250W8.00R04-06S08	●	6	-	25.0	8	5.90	S08	0.4			
VTB250W5.00R04-06S10	●	6	-	25.0	5	4.30	S10	0.4			
VTB250W6.00R04-06S10	●	6	-	25.0	6	4.30	S10	0.4			
VTB250W8.00R04-06S10	●	6	-	25.0	8	4.30	S10	0.4			

10

Endmills



For chamfered slotting

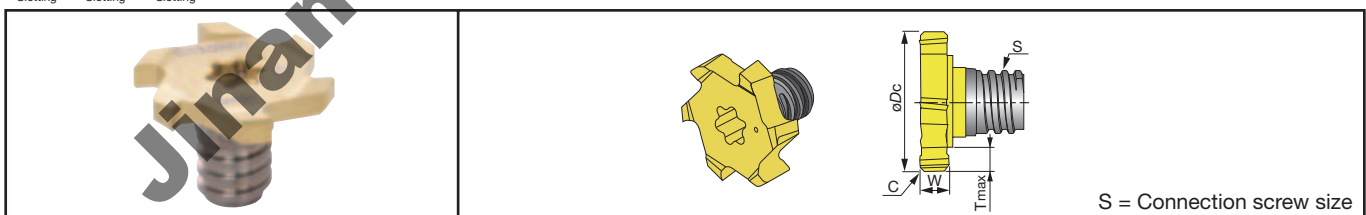

Cat. No.	Grade GH130	No. of flutes	Helix angle	Dimensions (mm)					Wrench	Torque (N·m)
				øDc $\begin{smallmatrix} 0 \\ -0.05 \end{smallmatrix}$	W ± 0.05	T max	S	C		
VTB135W2.00C15-06S05	●	6	-	13.5	2.5	2.65	S05	0.15	KEYV-T20	7

● High density type

● : Stocked items / Packing Quantity = 2 pcs.


Standard cutting conditions: Slotting (VST, VTB)

Work materials	Hardness (HB)	VST type		VTB type	
		Cutting speed V_c (m/min)	Feed per tooth f_z (mm/t)	Cutting speed V_c (m/min)	Feed per tooth f_z (mm/t)
Low carbon steels S45C, S55C etc (C45, C55 etc)	~ 300	130 (80-180)	0.10 (0.05-0.15)	130 (80-180)	0.13 (0.08-0.18)
High carbon steels SCM440, SCr415 etc (42CrMo4, 15Cr3 etc)	~ 300	90 (60-120)	0.08 (0.04-0.12)	90 (60-120)	0.10 (0.05-0.15)
Stainless steels SUS304, SUS316 etc (X5CrNi18-9, X5CrNiMo17-12-2 etc)	~ 200	80 (50-120)	0.08 (0.04-0.12)	80 (50-120)	0.10 (0.05-0.15)
Grey cast irons FC250, FC300 etc (GG25, GG30 etc)	150 ~ 250	150 (100-200)	0.10 (0.05-0.15)	150 (100-200)	0.13 (0.08-0.18)
Ductile cast irons FCD400 etc (GGG40 etc)			0.08 (0.04-0.12)		0.10 (0.05-0.15)
Aluminium alloys (Si < 13%)	-	300 (200-600)	0.10 (0.05-0.15)	300 (200-600)	0.13 (0.08-0.18)
Aluminium alloys (Si ≥ 13%)	-	200 (100-300)	0.08 (0.03-0.13)	200 (100-300)	0.10 (0.05-0.15)
Titanium alloys Ti-6Al-4V etc	-	50 (40-60)	0.08 (0.04-0.12)	50 (40-60)	0.10 (0.05-0.15)
Heat-resistant alloys Inconel 718 etc	-	25 (15-35)	0.06 (0.02-0.10)	25 (15-35)	0.06 (0.02-0.10)


TUNGMEISTER Shanks

VSSD-W-A

Straight shank and neck with coolant hole

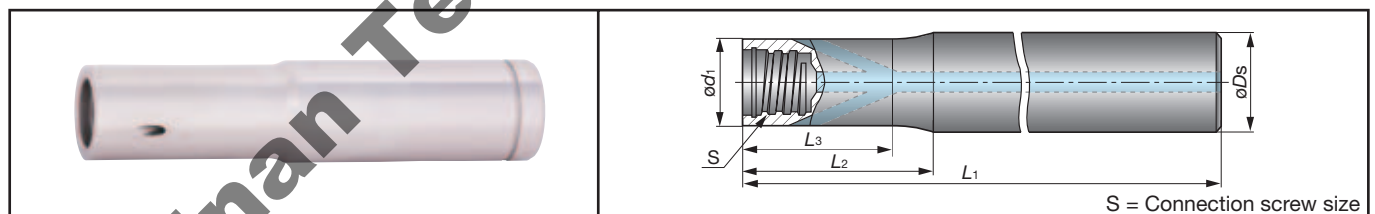

Cat. No.	Stock	Dimensions (mm)						Shank material
		ϕD_s	ϕd_1	L_1	L_2	L_3	S	
VSSD10L070S06-W-A	●	10	9.6	70	20	19	S06	Tungsten
VSSD10L090S06-W-A	●	10	9.6	90	40	39	S06	
VSSD10L110S06-W-A	●	10	9.6	110	60	59	S06	
VSSD12L070S08-W-A	●	12	11.5	70	20	19	S08	
VSSD12L090S08-W-A	●	12	11.5	90	40	39	S08	
VSSD12L110S08-W-A	●	12	11.5	110	60	59	S08	
VSSD12L130S08-W-A	●	12	11.5	130	80	79	S08	
VSSD16L070S10-W-A	●	16	15.2	70	20	18.5	S10	
VSSD16L090S10-W-A	●	16	15.2	90	40	36.5	S10	
VSSD16L110S10-W-A	●	16	15.2	110	60	58.5	S10	
VSSD16L130S10-W-A	●	16	15.2	130	80	78.5	S10	
VSSD20L090S12-W-A	●	20	18.3	90	40	37	S12	
VSSD20L130S12-W-A	●	20	18.3	130	80	77	S12	

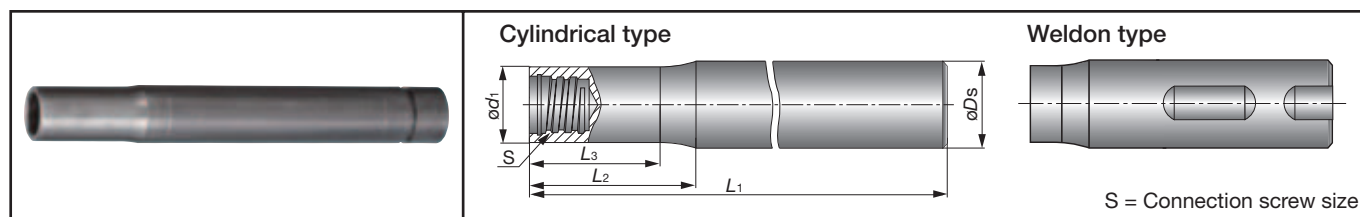


Cat. No.	Stock	Dimensions (mm)						Shank style	Shank material
		ϕd_s	ϕd_1	L_1	L_2	L_3	S		
VSSD08L060S05-S	●	8	7.6	60	15	12.5	S05	Cylindrical	Steel
VSSD10L075S06-S	●	10	9.6	75	20	17.5	S06		
VSSD12L090S08-S	●	12	11.5	90	16	13.5	S08		
VSSD16L100S10-S	●	16	15.2	100	20	18	S10		
VSSD20L120S12-S	●	20	18.3	120	25	20.5	S12		
VSSD08L070S05-C	●	8	7.6	70	20	18.5	S05	Cylindrical	Carbide
VSSD08L090S05-C	●	8	7.6	90	40	38.5	S05		
VSSD08L110S05-C	●	8	7.6	110	60	58.5	S05		
VSSD10L070S06-C	●	10	9.6	70	20	18.5	S06		
VSSD10L090S06-C	●	10	9.6	90	40	38.5	S06		
VSSD10L110S06-C	●	10	9.6	110	60	58.5	S06		
VSSD10L150S06-C	●	10	9.6	150	100	98.5	S06		
VSSD12L070S08-C	●	12	11.5	70	20	18	S08		
VSSD12L090S08-C	●	12	11.5	90	40	38	S08		
VSSD12L110S08-C	●	12	11.5	110	60	58	S08		
VSSD12L130S08-C	●	12	11.5	130	80	78	S08		
VSSD16L090S10-C	●	16	15.2	90	40	38	S10		
VSSD16L110S10-C	●	16	15.2	110	60	58	S10		
VSSD16L130S10-C	●	16	15.2	130	80	78	S10		
VSSD16L150S10-C	●	16	15.2	150	100	98	S10		
VSSD20L090S12-C	●	20	18.3	90	40	37	S12	Weldon	Steel
VSSD20L130S12-C	●	20	18.3	130	80	77	S12		
VSSD20L200S12-C	●	20	18.3	200	120	117	S12		
VSSD12L055W05-S	●	12	7.6	55	3.8	-	S05		
VSSD16L065W06-S	●	16	9.5	65	6	-	S06		
VSSD16L065W08-S	●	16	11.5	65	4	-	S08		
VSSD20L070W10-S	●	20	15.2	70	4	-	S10		
VSSD25L075W12-S	●	25	18.3	75	7.2	-	S12		

10

Endmills


Jinan Terry CNC Tool Co., Ltd.

● : Stocked items.

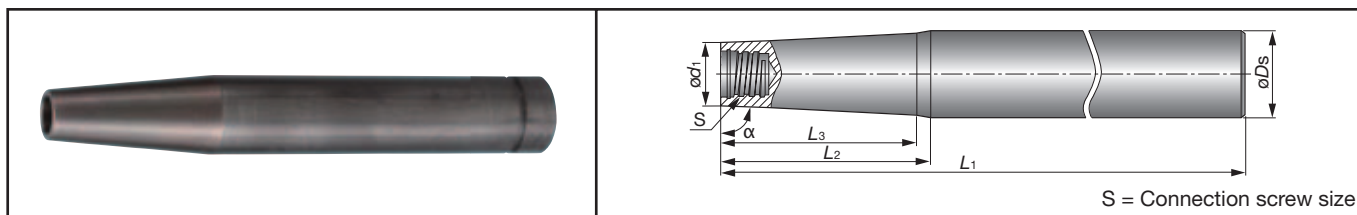


Cat. No.	Stock	Dimensions (mm)							Shank material
		α	ϕD_s	ϕd_1	L_1	L_2	L_3	S	
VTSD12L080S05-S	●	85°	12	7.6	80	25	-	S05	Steel
VTSD12L100S05-S	●	89°	12	7.6	100	35	29	S05	
VTSD16L125S06-S	●	85°	16	9.6	125	34	31	S06	
VTSD16L160S06-S	●	89°	16	9.6	160	55	46.5	S06	
VTSD16L140S08-S	●	85°	16	11.5	140	22	19	S08	
VTSD20L170S08-S	●	89°	20	11.5	170	80	69.5	S08	
VTSD20L140S10-S	●	85°	20	15.2	140	27.5	-	S10	
VTSD25L170S10-S	●	85°	25	15.2	170	56	-	S10	
VTSD20L190S10-S	●	89°	20	15.2	190	80	73	S10	
VTSD25L160S12-S	●	85°	25	18.3	160	40	-	S12	
VTSD32L190S12-S	●	85°	32	18.3	190	80	-	S12	
VTSD25L210S12-S	●	89°	25	18.3	210	100	94.5	S12	
VTSD12L110S05-C	●	89°	12	7.6	110	60	56	S05	Carbide
VTSD12L130S05-C	●	89°	12	7.6	130	80	77	S05	
VTSD16L150S05-C	●	89°	16	7.6	150	100	91	S05	
VTSD16L150S06-C	●	89°	16	9.6	150	100	98	S06	
VTSD16L170S06-C	●	89°	16	9.6	170	120	116.5	S06	
VTSD16L130S08-C	●	89°	16	11.5	130	80	76.5	S08	
VTSD16L150S08-C	●	89°	16	11.5	150	100	98	S08	
VTSD20L170S08-C	●	89°	20	11.5	170	120	112	S08	
VTSD20L170S10-C	●	89°	20	15.2	170	120	119	S10	
VTSD20L190S10-C	●	89°	20	15.2	190	140	-	S10	
VTSD20L210S10-C	●	89°	20	15.2	210	160	-	S10	
VTSD25L180S12-C	●	89°	25	18.3	180	120	115	S12	
VTSD25L250S12-C	●	89°	25	18.3	250	140	136.5	S12	

● : Stocked items.

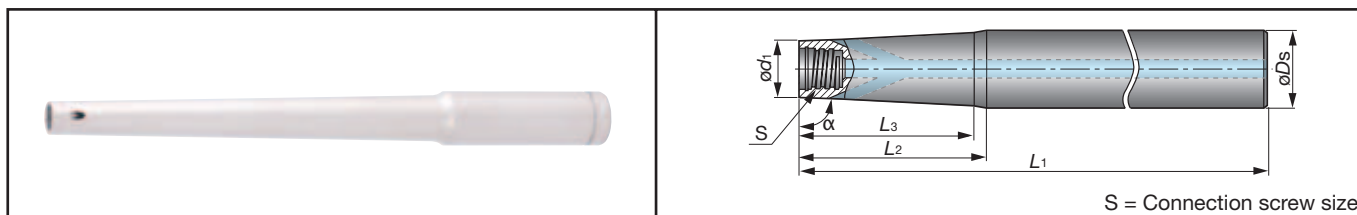


Cat. No.	Stock	Dimensions (mm)							Shank material
		α	ϕD_s	ϕd_1	L_1	L_2	L_3	S	
VTSD12L110S06-W-A	●	89°	12	9.6	110	60	59	S06	Tungsten
VTSD16L170S06-W-A	●	89°	16	9.6	170	120	116	S06	

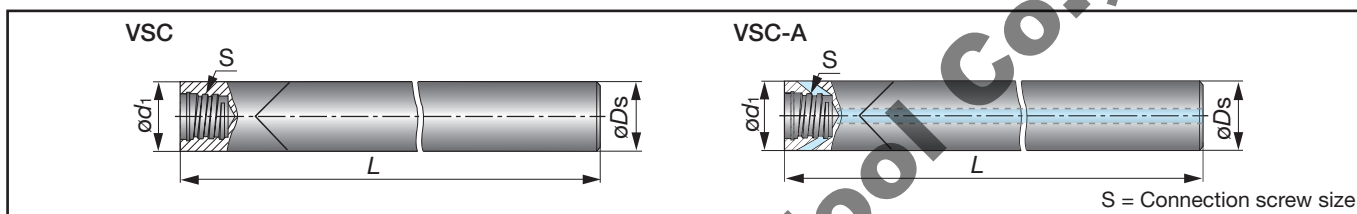

Cat. No.	Stock	Dimensions (mm)				Coolant hole	Shank material
		ϕD_s	ϕd_1	L	S		
VSC100L100S06-C	●	10	10	100	S06	without	Carbide
VSC120L100S08-C-A	●	12	12	100	S08	with	

Note:

- For VSC-C type shank, just VST slotting head is recommended. If other heads are used on the VSC-C shank, the depth of cut must be smaller than the max. ap in each head. The VSC-C type shank does not have external clearance, so the shank may interfere with the work piece.

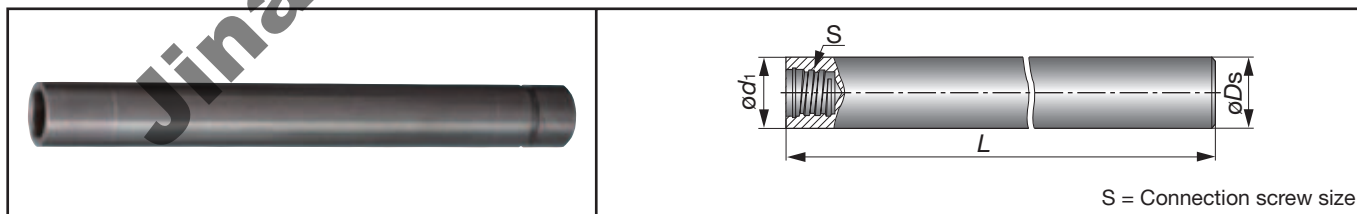


Cat. No.	Stock	Dimensions (mm)				Shank material
		ϕD_s	ϕd_1	L	S	
VSTD08L070S05-S	●	8	8	70	S05	Steel
VSTD10L080S06-S	●	10	10	80	S06	
VSTD12L090S08-S	●	12	12	90	S08	
VSTD16L100S10-S	●	16	16	100	S10	

Note:




- For VSTD type shank, only VTB slotting head is recommended. If other heads are used on the VSTD shank, the depth of cut must be smaller than the max. ap in each head. The VSTD type shank does not have external clearance, so the shank may interfere with the work piece.

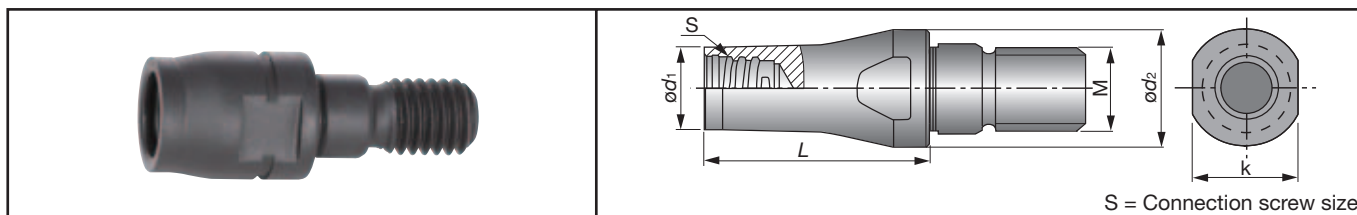● : Stocked items.



Cat. No.	Stock	Dimensions (mm)						Shank material
		ϕd_1	ϕd_2	L	S	M	k	
VAD130L016S08-S-M8	●	11.7	13	16	S08	M8	11	Steel
VAD130L025S08-S-M8	●	11.7	13	25	S08	M8	11	
VAD180L020S08-S-M10	●	11.7	18	20	S08	M10	13	
VAD180L025S08-S-M10	●	11.7	18	25	S08	M10	11	
VAD210L020S08-S-M12	●	11.7	21	20	S08	M12	12,75	
VAD210L025S08-S-M12	●	11.7	21	25	S08	M12	12,75	


TUNGMEISTER Wrench

Appearance	Cat. No.	Stock	Connection screw size	Torque (N·m)	Applicable head
	KEYV-S05	●	S05	7	Square Ball Radius Drilling Chamfering Counter boring
	KEYV-S06	●	S06	10	
	KEYV-S08	●	S08	15	
	KEYV-S10	●	S10	28	
	KEYV-S12	●	S12	28	
	KEYV-177	●	S06	10	Slotting VST type
	KEYV-217	●	S08	15	
	KEYV-T40L	●	S08 / S10	15	Slotting VST and VTB type
	KEYV-T20	●	S05	7	Slotting VTB type
			S06	10	
	KEYV-T25	●	S06	10	
	KEYV-T30L	●	S08	15	
	KEYV-T50L	●	S08	28	
			S10		

Note: Optional parts

■ CAUTIONARY POINTS IN USE

- The cutting heads specified by Tungaloy must be used. Avoid using alternate heads that are not Tungaloy products as this will damage the shank and can cause severe accident or injury.
- Before setting the head, clean the connection screw with an air blast or a wiping cloth to remove chips and other foreign matter that may remain.
- Do not apply the lubricant to the connection screw.
- Please use the correct "Wrench" with the correct cutting head. Tighten the head slowly until the face of the head contacts the shank. (Please refer to the picture shown on the right.) Re-tightening or over-tightening is not required. Excessive tightening may cause the cutting head to break.
- Do not apply excessive force or a hammer when tightening or exchanging the cutting heads.

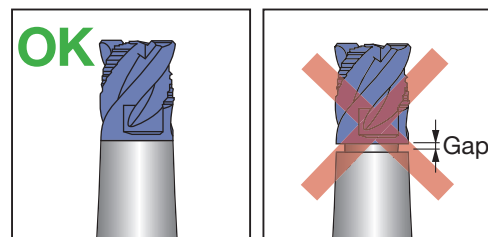

● : Stocked items.